


HEX-O MODULE 750

suspended single
073-692610W



| | |
|----------------|--|
| Project / Type | |
| Notes | |
| Count / Date | |

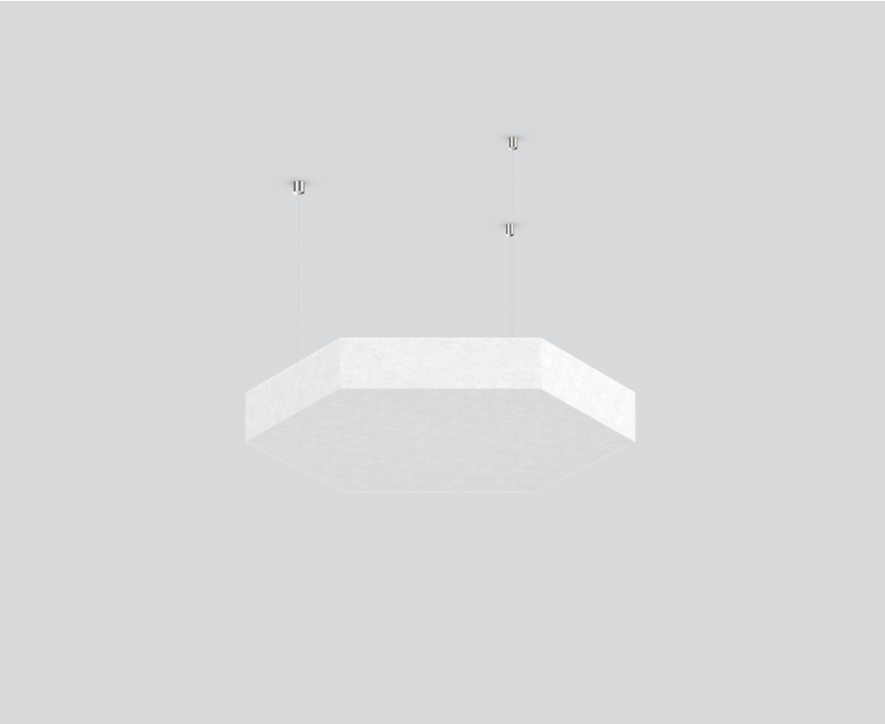

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, white; foreign fiber inclusions possible; pendant fitting with 1500mm cable suspension (3 cables); height adjustment without tools; suitable for single installation; sound absorbing HEX-O ABSORBER available as an accessory; accessories are listed separately;

Product drawing



| | |
|---------------------|--|
| General | |
| Ceiling , Suspended | |
| white | |

| | |
|-----------------------------|--|
| Physical | |
| cable 1500 mm (min. 500 mm) | |
| length 750 mm | |
| width 650 mm | |
| height 100 mm | |
| 4.7 kg | |

| | |
|---|--|
| Acoustics | |
| Alpha w (α_w) up to 0.9 ¹ | |
| SAC (sound absorption class) up to A ¹ | |
| NRC up to 0.85 ¹ | |
| SAA up to 0.88 ¹ | |

¹ Acoustic data calculations based on HEX-O MODULE 750, cavity 1cm

Installation instructions



HEX-O MODULE 750

suspended single
073-692610W



Project / Type


Notes

Count / Date

Equivalent sound absorption area (A_{eq})

| 125 HZ | 250 HZ | 500 HZ | 1000 HZ | 2000 HZ | 4000 HZ |
|--------|--------|--------|---------|---------|---------|
| 0.17 | 0.33 | 0.57 | 0.6 | 0.53 | 0.6 |

Sound absorption coefficient (α_p)

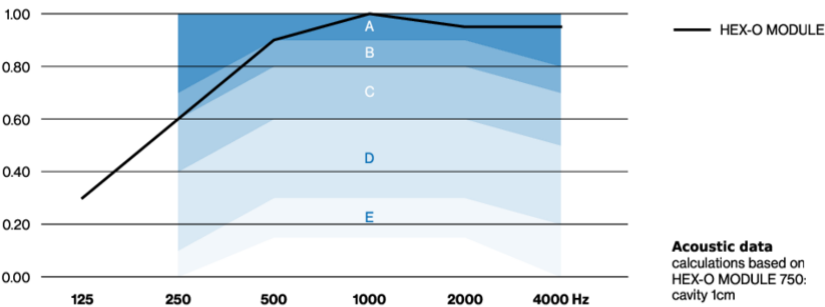

Acoustic accessories

HEX-O ABSORBER 1000

| COLOUR | L-W-H (MM) | ARTICLE NUMBER(S) |
|--------------------------|--------------|-------------------|
| marble grey | 1000-866-237 | 073-691740D |
| felt grey | 1000-866-237 | 073-691740G |
| black | 1000-866-237 | 073-691740L |
| white | 1000-866-237 | 073-691740W |
| acoustic special colours | 1000-866-237 | 073-691740X |

