

HEX-O 500

ceiling


073-615163XP



Project / Type


Notes

Count / Date

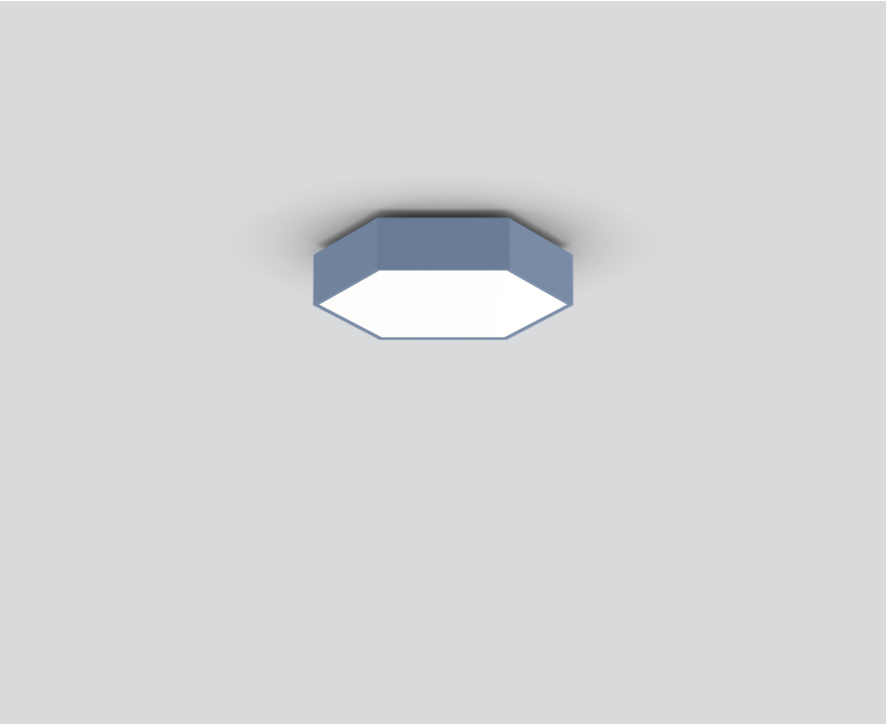


Hexagonal light fitting from aluminium profile; seamlessly welded; surface special colours powder coated; suitable for ceiling mounting; convenient quick mounting system without tools; suitable for single or group installation; can be combined with all HEX-O ceiling and TRIG-O ceiling luminaires and acoustic elements; highly reflective coating for improved efficiency; microprismatic PMMA cover; completely homogeneous illumination; same luminance for all size versions; UGR ≤ 19 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 3000 \text{ cd/m}^2$; light colour 4000 K; binning initial MacAdam $\leq 3 \text{ SDCM}$; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; luminaire with 2 cable openings and plug-in terminal for through wiring; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; sound absorbing HEX-O ABSORBER available as an accessory; accessories are listed separately; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling , Surface

special colours

IP20

1980 lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

initial MacAdam $\leq 3 \text{ SDCM}$

MR 0.72

MDER 0.66

Optical

Microprismatic

microprismatic

UGR < 19 , $\geq 65^\circ < 3000 \text{ cd/m}^2$

PstLM $\leq 1.0^1$

SVM $\leq 0.4^1$

Electrical

DALI-2

220-240 V

system 16.3 W

system 121 lm/W²

PC1

1 DALI Addr.

minimum cable length on-site 0.5m

Physical

length 500 mm

width 433 mm

height 100 mm

5.5 kg

¹ Value of containing product at full load (undimmed)
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

