

# HEX-O MODULE 1000


ceiling  
073-691710G



Project / Type

Notes

Count / Date

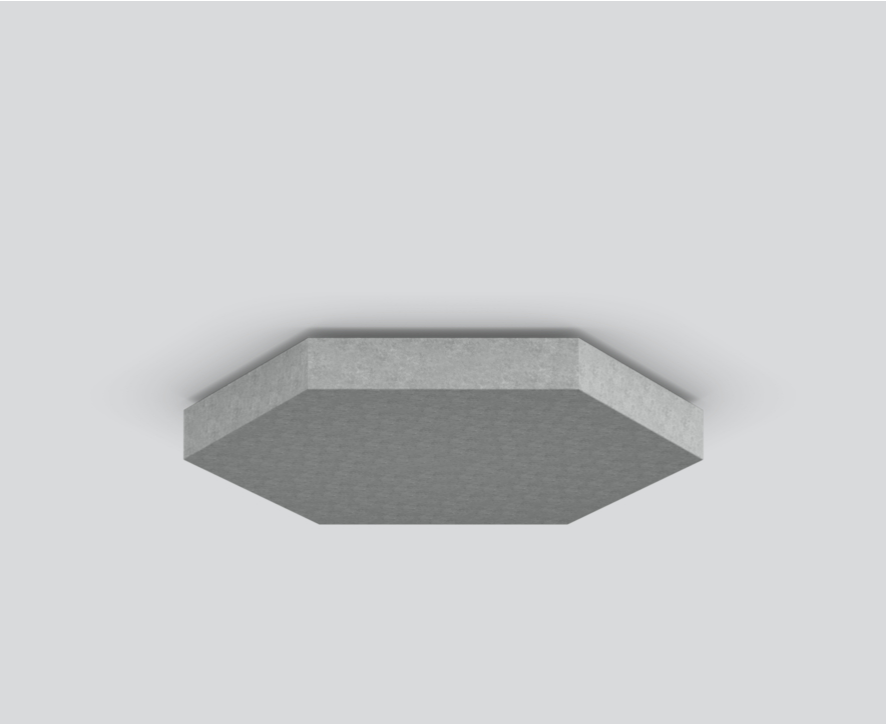

General

Ceiling , Surface

felt grey

Physical

length 1000 mm

width 866 mm

height 100 mm

7.6 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.9 <sup>1</sup>

SAC (sound absorption class) up to A <sup>1</sup>

NRC up to 0.85 <sup>1</sup>

SAA up to 0.88 <sup>1</sup>


<sup>1</sup> Acoustic data calculations based on HEX-O MODULE 750, cavity 1cm

## Installation instructions



Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, felt grey; foreign fiber inclusions possible; suitable for ceiling mounting; convenient quick mounting system without tools; suitable for single or group installation; can be combined with all HEX-O ceiling and TRIG-O ceiling luminaires and acoustic elements;

## Product drawing



# HEX-O MODULE 1000

ceiling  
073-691710G



Project / Type

Notes

Count / Date

## Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.27	0.54	0.91	0.97	0.86	0.97

## Sound absorption coefficient ( $\alpha_p$ )

