

HEX-O ABSORBER 750


073-691640X



Project / Type

Notes

Count / Date

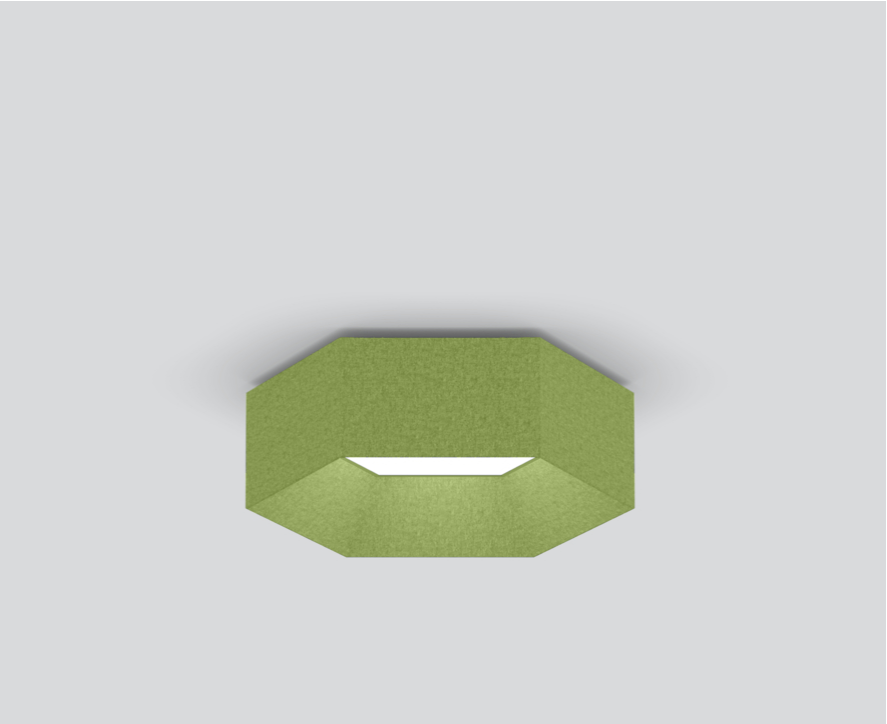

Hexagonal acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; high quality visual and tactile surface, acoustic special colours; foreign fiber inclusions possible; to combine with HEX-O 500 or HEX-O MODULE 500; installation without tools;

General

Luminaire / Track , Mounted

acoustic special colours

Physical

length 750 mm

width 650 mm

height 237 mm

3.3 kg

Acoustics

Alpha w (α_w) up to 0.95 ¹

SAC (sound absorption class) up to A ¹

NRC up to 0.9 ¹

SAA up to 0.96 ¹

¹ Acoustic data calculations based on HEX-O ABSORBER 1000, cavity 1cm

Installation instructions



HEX-O ABSORBER 750

073-691640X



Project / Type

Notes

Count / Date

Equivalent sound absorption area (A_{eq})

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.42	0.61	0.98	0.86	0.84	0.84

Sound absorption coefficient (α_p)

