


VELA 1200 direct / indirect  
power  
suspended  
073-128453XO



Project / Type

Notes

Count / Date

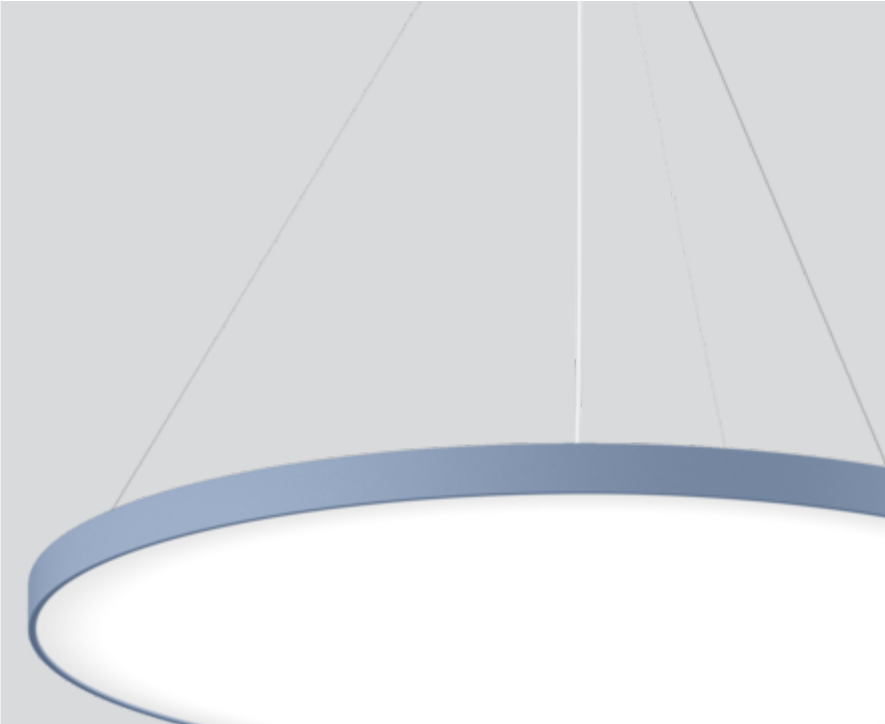

IP40

220-240V

X-PERT

UGR  $\leq 22$

CRI  $\geq 80$

4-ADDR.

X-PERT

General

Ceiling , Suspended

special colours

IP40

indirect 5730 lm

direct 19400 lm

total 25100 lm

LED

3000 K

CRI  $\geq 80$

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam  $\leq 3$  SDCM

MR 0.54

MDER 0.49

Optical

Opal

opal (lambertsch)

PstLM  $\leq 1.0$ <sup>1</sup>

SVM  $\leq 0.4$ <sup>1</sup>

Electrical

DALI-2

185 W

PC1 220-240V

136 lm/W

4 DALI Addr.

Physical

cable 1500 mm


diameter 1200 mm

height 87 mm


19 kg

<sup>1</sup> Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation  
instructions



Lighting  
calculator



[073-128453XO] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com