

# VELA 1200 direct / indirect power


suspended  
073-128453XK



Project / Type


Notes

Count / Date

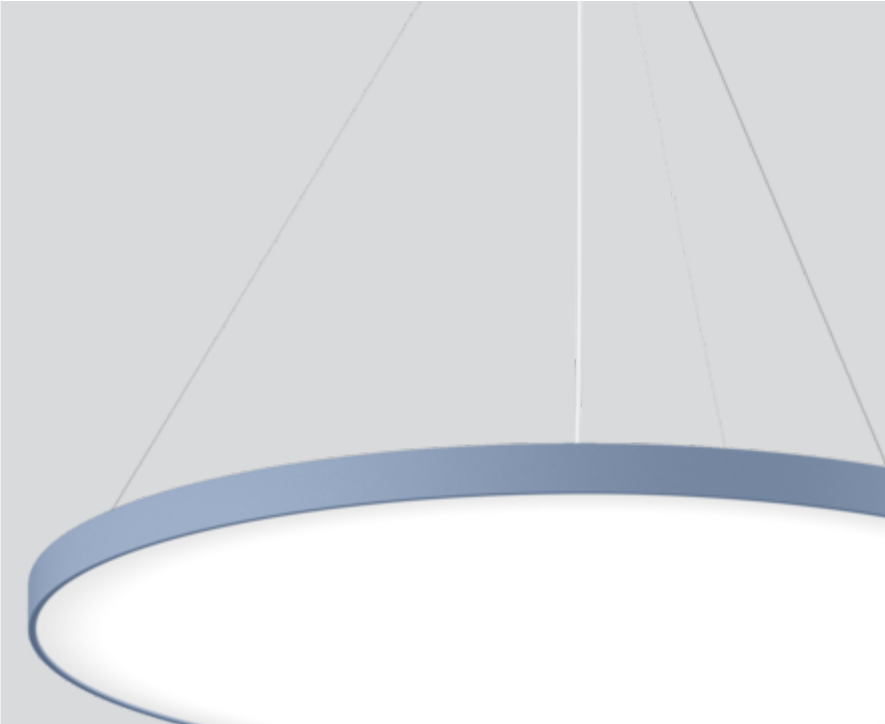


Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface special colours powder coated; highly reflective coating for improved efficiency; suspended luminaire with 1500mm cable suspension; with integrated toolless suspension height adjustment on the luminaire; incl. feed (white); microprismatic PMMA cover; completely homogeneous illumination;  $UGR \leq 19$ ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above  $65^\circ \leq 3000 \text{ cd/m}^2$ ; direct / indirect radiation characteristic for additional accentuation of the ceiling; light colour 3000 K; binning initial MacAdam  $\leq 3 \text{ SDCM}$ ; CRI  $\geq 80$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; canopy with 2 cable openings and plug-in terminal for through wiring; degree of protection IP40; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



## General

Ceiling , Suspended

special colours

IP40

indirect 5730 lm

direct 19400 lm

total 25100 lm

## LED

3000 K

CRI  $\geq 80$

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam  $\leq 3 \text{ SDCM}$

MR 0.54

MDER 0.49

## Optical

Microprismatic

microprismatic

$UGR < 19, \geq 65^\circ < 3000 \text{ cd/m}^2$

$P_{stLM} \leq 1.0^1$

$SVM \leq 0.4^1$

## Electrical

DALI-2

system 185 W

PC1 220-240V

system 136 lm/W<sup>2</sup>

4 DALI Addr.

## Physical

cable 1500 mm

diameter 1200 mm

height 87 mm

19 kg

<sup>1</sup> Value of containing product at full load (undimmed)  
<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions



## Lighting calculator

