

VELA 1200 direct

ceiling


073-118163XK



Project / Type _____

Notes _____

Count / Date _____

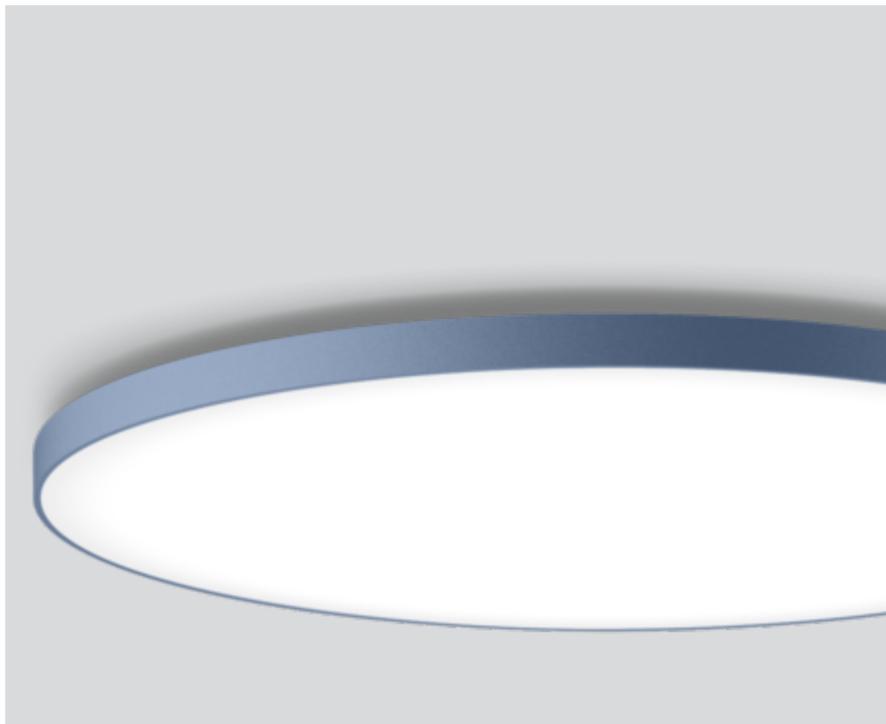

IP 40



General

Ceiling , Surface _____

special colours _____

IP40 _____

20500 lm _____

LED

4000 K _____

CRI \geq 80 _____

L90 / 50000 h _____

initial MacAdam \leq 3 SDCM _____

MR 0.72 _____

MDER 0.66 _____

Optical

Microprismatic _____

microprismatic _____

UGR \leq 19 , \geq 65° <3000 cd/m² _____

PstLM \leq 1.0¹ _____

SVM \leq 0.4¹ _____

Electrical

DALI-2 _____

220-240 V _____

system 147 W _____

system 139 lm/W² _____

PC1 _____

3 DALI Addr. _____

Physical

diameter 1200 mm _____

height 92 mm _____


19.2 kg _____

¹ Value of containing product at full load (undimmed)


² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface special colours powder coated; highly reflective coating for improved efficiency; suitable for ceiling mounting; convenient quick mounting system without tools; microprismatic PMMA cover; completely homogeneous illumination; UGR \leq 19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65° \leq 3000 cd/m²; light colour 4000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; luminaire with 2 cable openings and plug-in terminal for through wiring; degree of protection IP40; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions



Lighting calculator



VELA 1200 direct

ceiling

073-118163XK



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.93	0.91	0.9
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	3
B13	4
B16	5
B20	6
C10	6
C13	8
C16	10
C20	12

Other accessories

DISMOUNTING TOOL

TYPE
for ø600/900/1200

ARTICLE NUMBER(S)
073-1100000

