


# VELA 1200 direct

ceiling

073-1181638K



Project / Type
Notes
Count / Date

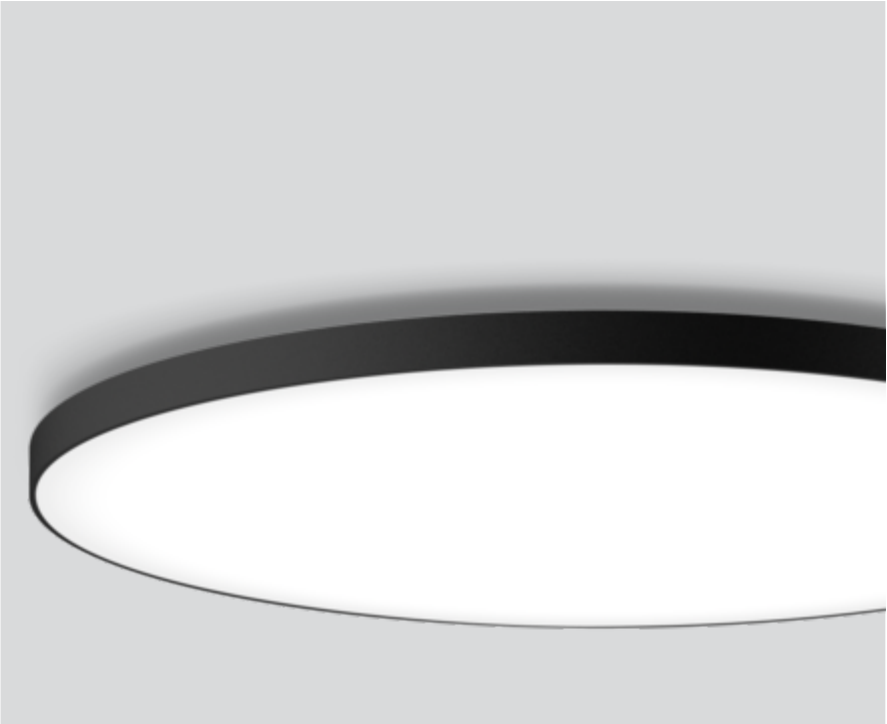

IP40	220-240V	X-PERT	UGR	cd/m <sup>2</sup>	CRI	3-ADR	X-PERT
------	----------	--------	-----	-------------------	-----	-------	--------

## General

Ceiling , Surface
black , RAL9005 <sup>1</sup>
IP40
20500 lm

## LED

4000 K
CRI ≥ 80
L90 / 50000 h
photobio. safety RG 0 - no Risk
initial MacAdam ≤ 3 SDCM
MR 0.72
MDER 0.66

## Optical

Microprismatic
microprismatic
UGR < 19 , ≥65° <3000 cd/m <sup>2</sup>
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

## Electrical


DALI-2
147 W
PC1 220-240V
139 lm/W
3 DALI Addr.

## Physical


diameter 1200 mm
height 92 mm
19.2 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Light distribution



## Product drawing



## Installation instructions



## Lighting calculator



# VELA 1200 direct

ceiling

073-1181638K



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.95	0.93	0.91	0.9
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF <sup>a</sup>	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF <sup>a</sup>	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	3
B13	4
B16	5
B20	6
C10	6
C13	8
C16	10
C20	12

## Other accessories

### DISMOUNTING TOOL

ARTICLE NUMBER(S)

073-1100000

