

VELA 300 direct / indirect soft


surface
073-113761XK



Project / Type _____

Notes _____

Count / Date _____

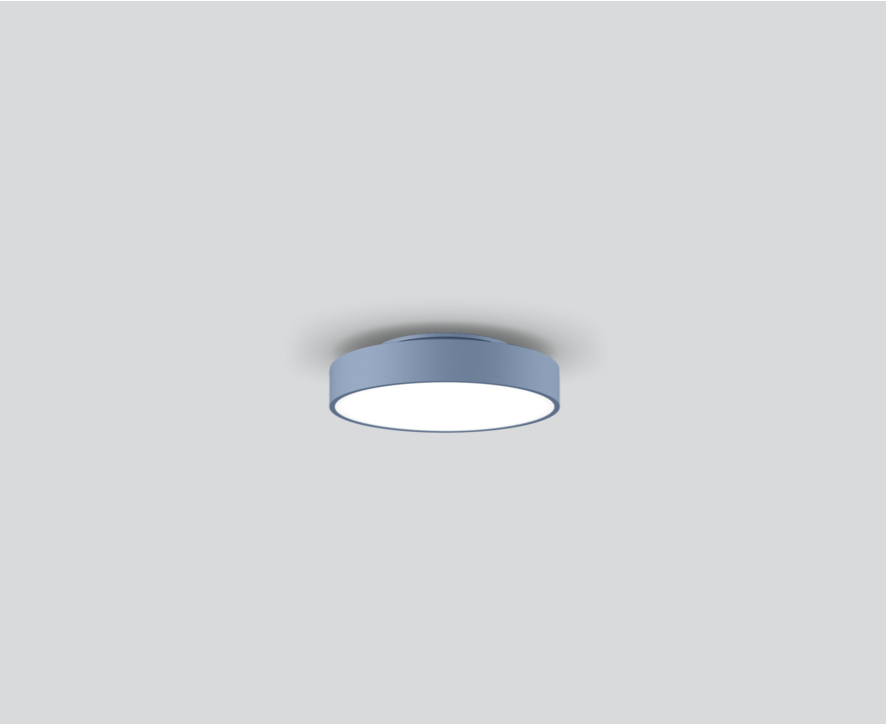

IP 40 X-PERT

General

Ceiling / Wall , Surface _____

special colours _____

IP40 _____

indirect 62 lm _____

direct 1080 lm _____

total 1140 lm _____

LED

4000 K _____

CRI ≥ 80 _____

L90 / 50000 h _____

initial MacAdam ≤ 3 SDCM _____

MR 0.72 _____

MDER 0.66 _____

Optical

Microprismatic _____

microprismatic _____

UGR < 19 , $\geq 65^\circ$ < 3000 cd/m² _____

PstLM ≤ 1.0 ¹ _____

SVM ≤ 0.4 ¹ _____

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface special colours powder coated; highly reflective coating for improved efficiency; suitable for wall or ceiling mounting; convenient quick mounting system without tools; microprismatic PMMA cover; completely homogeneous illumination; UGR ≤ 19 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 3000$ cd/m²; direct / indirect radiation characteristic for additional accentuation of the ceiling; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; luminaire with 2 cable openings and plug-in terminal for through wiring; degree of protection IP40; PC1; 220-240 V; internal wiring in light halogen free; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Electrical

non DIM _____


220-240 V _____

system 10.1 W _____


system 113 lm/W² _____

PC1 _____

Light distribution



Product drawing



Physical

diameter 300 mm _____

height 88 mm _____

1.6 kg _____

¹ Value of containing product at full load (undimmed)
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

