

SONO 260 direct

surface


071-91265370



Project / Type

Notes

Count / Date

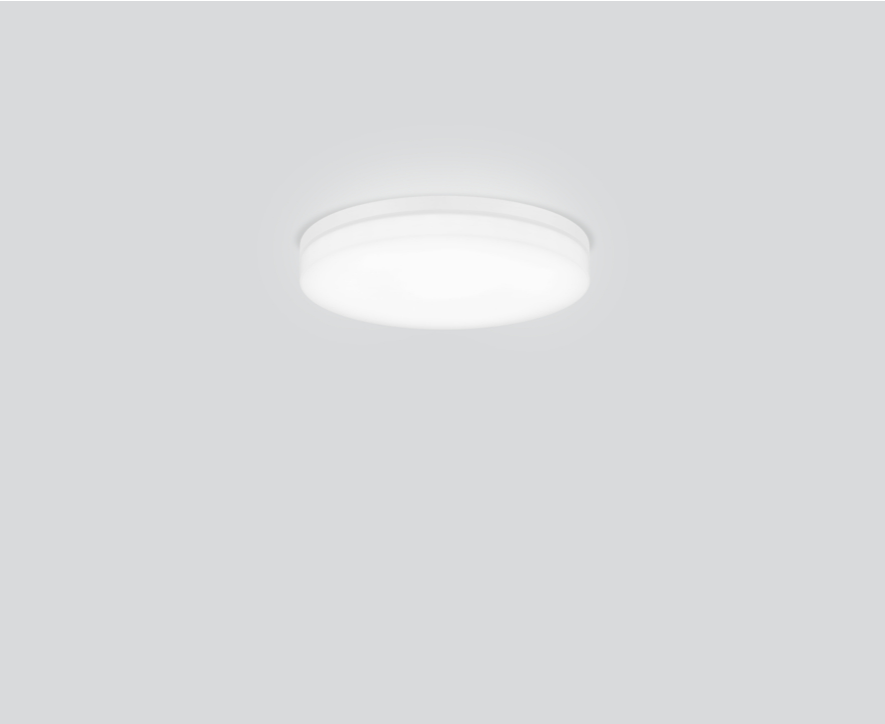

IP50

220-240V

UGR<22

CRI>80

IK07

LM78

LM78

General

Ceiling / Wall , Surface

white , RAL9010 ¹

IP50

IK07

950 lm

LED

3000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.54

MDER 0.49

Optical

Opal

opal (lambertsch)

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

7.6 W

PC1 220-240V

125 lm/W

1 DALI Addr.

Physical


diameter 255 mm

height 82 mm


1.4 kg

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions

