

COMBO 900

trim


064-1071637K



Project / Type

Notes

Count / Date

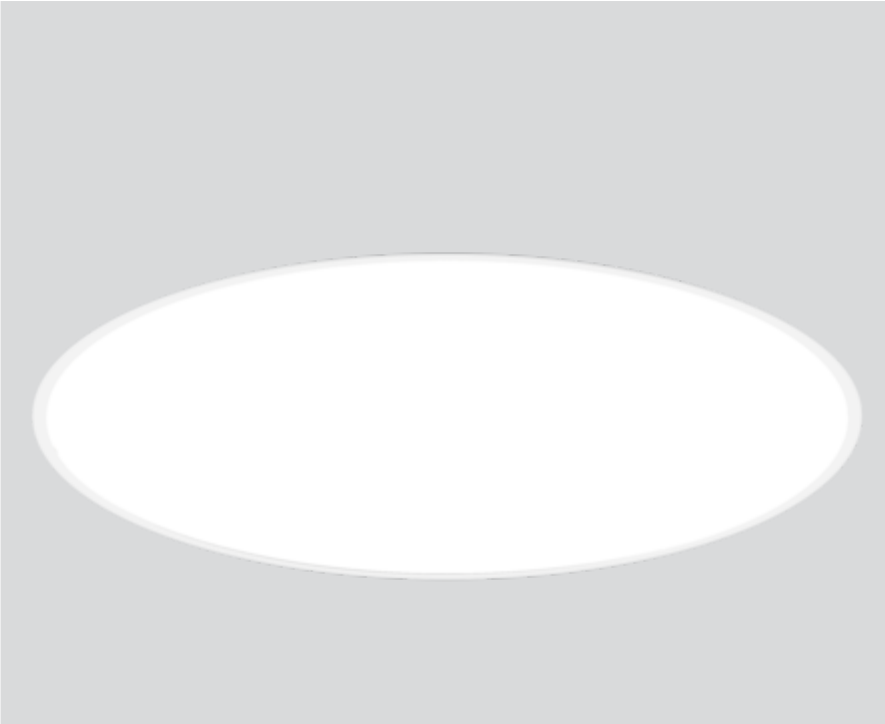

RG0
IEC 62471

220-240V

IP40

X-PERT

X-PERT

General

Ceiling , Recessed

white , RAL9010 ¹

IP40

7900 lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.66

Optical

Microprismatic

microprismatic

UGR < 19 , ≥65° <3000 cd/m²

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

58 W

PC1 220-240V

136 lm/W

1 DALI Addr.

Physical

trim

diameter 916 mm

height 105 mm

11.3 kg

Cutout

diameter 905 mm


min. ceiling thickness 10 mm

max. ceiling thickness 25 mm


recessed depth 105 mm

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator

