

# MOVE IN 32 flex round

trimless

063-8211517S 063-8811117 002-90743



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Semi-Recessed \_\_\_\_\_

tilt max 90° \_\_\_\_\_

rotation 360° \_\_\_\_\_

white , RAL 9016 <sup>1</sup> \_\_\_\_\_

IP20 \_\_\_\_\_

800 lm \_\_\_\_\_

fixture 91 lm/W<sup>2</sup> \_\_\_\_\_

## LED

3000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>{1-15}</sub>: 88 \_\_\_\_\_

MR 0.59 \_\_\_\_\_

MDER 0.53 \_\_\_\_\_

## Optical

spot \_\_\_\_\_

beam angle 18° \_\_\_\_\_

P<sub>stLM</sub> ≤ 1.0 <sup>3</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>3</sup> \_\_\_\_\_

## Electrical

DALI-2 \_\_\_\_\_

220-240 V \_\_\_\_\_

system 11.7 W \_\_\_\_\_

fixture 8.7 W \_\_\_\_\_


36 Vf \_\_\_\_\_

250 mA \_\_\_\_\_

PC2 \_\_\_\_\_

1 DALI Addr. \_\_\_\_\_


## Light distribution



spot 18°

h (m)	E0° (lx)	ø (m)
1	6060	0.32
2	1510	0.63
3	670	0.95
4	380	1.27
5	240	1.58

## Product drawing

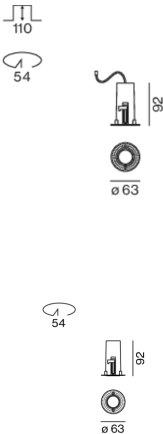

## Physical

trimless \_\_\_\_\_

diameter 63 mm \_\_\_\_\_

height 92 mm \_\_\_\_\_

0.5 kg \_\_\_\_\_

## Cutout

diameter 54 mm \_\_\_\_\_

min. ceiling thickness 9 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_

recessed depth 110 mm \_\_\_\_\_

<sup>1</sup> RAL code

<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

<sup>3</sup> Value of containing product at full load (undimmed)



# MOVE IN 32 flex round

trimless

063-8211517S 063-8811117 002-90743



Project / Type

Notes

Count / Date

Installation  
instructions



Lighting  
calculator

