

MOVE IN 32 flex round

trimless

063-8211418S 063-8811117 002-90743



Project / Type

Notes

Count / Date



General

Ceiling , Semi-Recessed

tilt max 90°

rotation 360°

black , RAL 9005 ¹

IP20

754 lm

fixture 86 lm/W²

LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_r: 91 , R₍₁₋₁₅₎: 89

MR 0.53

MDER 0.48

Optical

spot

beam angle 18°

P_{stLM} ≤ 1.0 ³

SVM ≤ 0.4 ³

Electrical

DALI-2

220-240 V

system 11.6 W

fixture 8.7 W


36 Vf

250 mA

PC2

1 DALI Addr.


Light distribution



spot 18°

h (m)	E0° (lx)	ø (m)
1	5710	0.32
2	1430	0.63
3	630	0.95
4	360	1.27
5	230	1.58

Product drawing

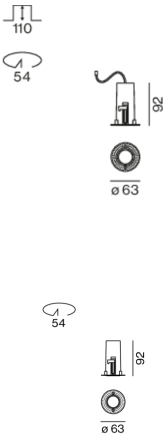

Physical

trimless

diameter 63 mm

height 92 mm

0.5 kg

Cutout

diameter 54 mm

min. ceiling thickness 9 mm

max. ceiling thickness 25 mm

recessed depth 110 mm

¹ RAL code

² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

³ Value of containing product at full load (undimmed)



MOVE IN 32 flex round

trimless

063-8211418S 063-8811117 002-90743



Project / Type

Notes

Count / Date

Installation
instructions



Lighting
calculator

