

MOVE IN 32 flex round

trimless

063-8211417F 063-8811117 002-90742



Project / Type

Notes

Count / Date



General

Ceiling , Semi-Recessed

tilt max 90°

rotation 360°

white , RAL9016 ¹

IP20

750 lm

LED

2700 K

CRI ≥ 90

L80 / 50000 h

initial MacAdam ≤ 2 SDCM

R_g: 99 , R_f: 91 , R₍₁₋₁₅₎: 89

MR 0.53

MDER 0.48

Optical

flood

beam angle 34°

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

11.6 W

inset 8.7 W

36 Vf

250 mA

PC2 220-240V

65 lm/W

Physical

trimless

diameter 63 mm

height 92 mm

0.35 kg

Cutout

diameter 54 mm


min. ceiling thickness 9 mm

max. ceiling thickness 25 mm

recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)


Light distribution



flood 34°

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 2450 | 0.61 |
| 2 | 610 | 1.21 |
| 3 | 270 | 1.82 |
| 4 | 150 | 2.42 |
| 5 | 100 | 3.03 |

Product drawing

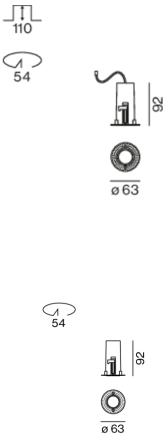

Installation instructions



Lighting calculator

