

TASK angular

suspended

EN Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; Luminaire housing made of aluminium – rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, tool-less height adjustment; convenient quick mounting system without tools; incl. transparent feed; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; canopy for through wiring; optional acoustic elements available


DE Rechteckige Pendelleuchte, bestehend aus einzelnen L-förmigen bzw. rechteckigen Elementen; Leuchtenkörper aus Aluminium – abgerundete Kanten; extrem flache Bauform (nur 15 mm); Oberfläche pulverbeschichtet; werkzeuglos höhenverstellbare Seilabhängung; komfortables, werkzeugloses Schnellmontagesystem; inkl. Einspeiseleitung; direkte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach unten gelenkt; Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom und maximale Deckenaufhellung; absolut homogene Ausleuchtung; energieeff. LEDs – sehr gute Farbwiedergabe; Baldachin für Weiterverdrahtung; optional Akustikelemente erhältlich

Quickinfo

4000 K
 CRI ≥ 90, 3 SDCM
 up to 118 lm/W
 L95 @ 50 000 h
 DALI-2
 microprismatic (UGR ≤ 19)

acoustic elements
 PET felt
 ♻️ from recycled material
 up to absorption class A
 🔥 available as B-s1, d0

Types



Luminaire colours



Acoustic colours




Light distribution




DiiA® standards
 251, 252, 253




click-system



microprismatic
 (UGR ≤ 19)



acoustic elements



CRI ≥ 98
 XPECTRUM

Order options

COLOUR TEMPERATURE

4000 K

CONTROL

DALI-2

LUMINAIRE COLOUR

- pure white RAL 9010 7
- jet black RAL 9005 8

ACOUSTIC COLOUR

- white W
- marble grey D
- felt grey G
- black L
- special colours p. 992 X

LIGHT OPTIC COVER

microprismatic (UGR ≤ 19)



Options on request

COLOUR RENDERING INDEX

CRI ≥ 80
CRI ≥ 98 XPECTRUM

FORM

for other configurations see
TASK S suspended system

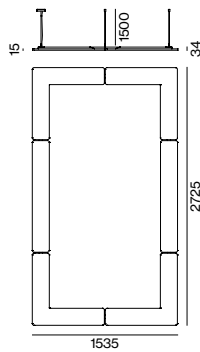

TASK angular suspended



DIRECT / INDIRECT POWER

| SYSTEM POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|--------------|--------------|---------------------|--------------|
| 197 W | 4000 K | ↓ 15200 / ± 8050 lm | 059-528313 K |


TASK long angular suspended



DIRECT / INDIRECT POWER

| SYSTEM POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|--------------|--------------|----------------------|--------------|
| 280 W | 4000 K | ↓ 22480 / ± 11620 lm | 059-528413 K |

Technical data



TASK long angular, 280 W, 4000 K, direct/indirect power

ROOM VALUES

| | |
|--------------------|-----------------|
| Room dimensions | 5.4 × 4 × 2.8 m |
| Reflection factor | 0.7 0.5 0.2 |
| Maintenance factor | 0.8 |
| Suspension height | 2.25 m |

CALCULATION SURFACE


| | |
|---------------------------------------|-------------|
| Surface dimensions | 3.2 × 1.2 m |
| Surface height | 0.75 m |
| Average illuminance (E _m) | > 500 lx |
| Uniformity (U ₀) | > 0.6 |

GLARE EVALUATION

| | |
|--|------|
| Table Classification X=4H Y=8H S=0.25H | |
| UGR transversal | ≤ 19 |
| UGR axial | ≤ 19 |



Light distribution





microprismatic
direct/indirect power


LUMINOUS FLUX value calculated for
CRI ≥ 90, colour white, cover microprismatic

Acoustic elements

TASK ACOUSTIC inlay

| | TYPE | L-W-H (mm) | ORDER CODE |
|---|-----------------------------|--------------|--------------|
| 1 | TASK angular suspended | 1155-1155-30 | 059-579716 K |
| 2 | TASK long angular suspended | 1155-2346-30 | 059-579718 K |



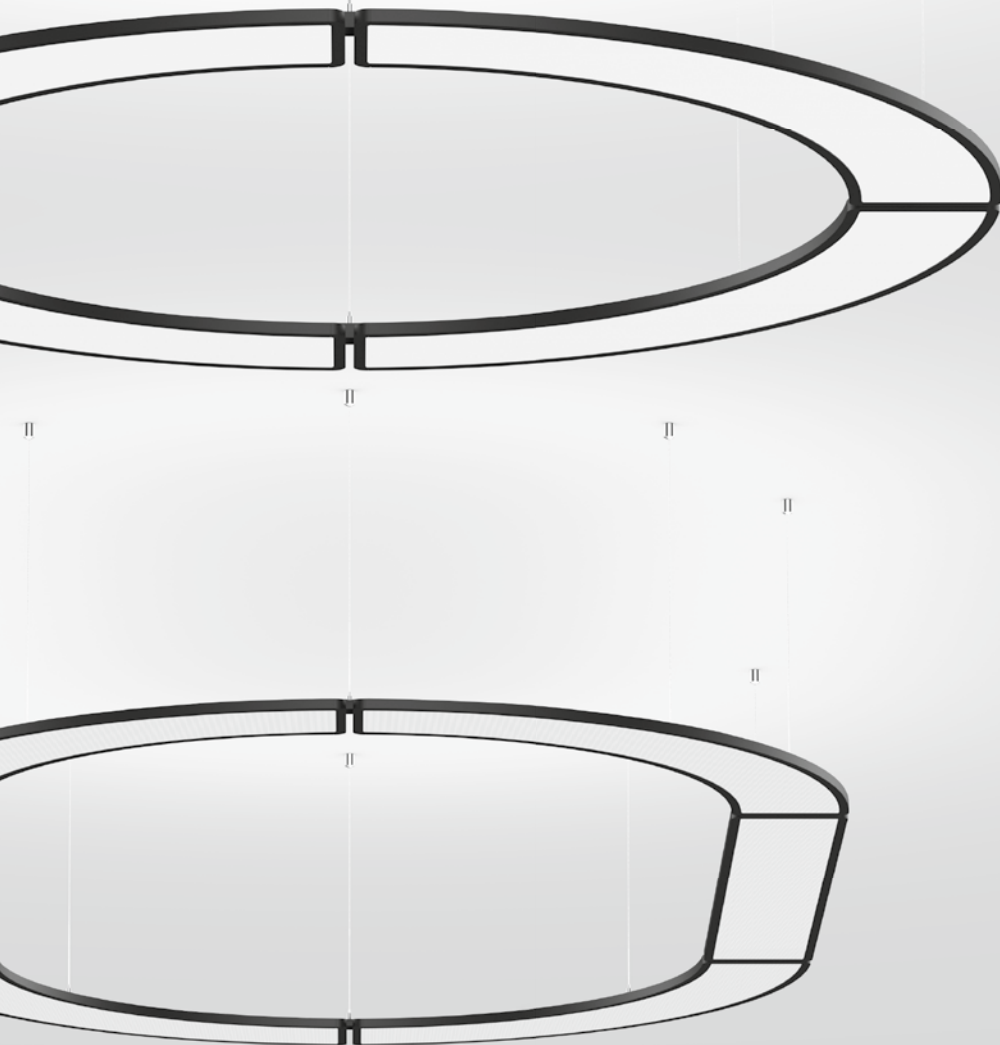

TASK circle

suspended

EN Ring-shaped suspended luminaire, consisting of single elements in quarter circle or rectangular shape; Luminaire housing made of aluminium – rounded edges; ultra low-profile design (only 15 mm); surface powder coated; cable suspension, tool-less height adjustment; convenient quick mounting system without tools; incl. feed; direct light distribution by LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; indirect component with special PCBs for increased luminous flux and maximum ceiling illumination; completely homogeneous illumination; energy-eff. LEDs – very good colour rendering; canopy for through wiring; optional acoustic elements available


DE Ringförmige Pendelleuchte, bestehend aus einzelnen Elementen in Viertelring- bzw. Rechteck-Form; Leuchtenkörper aus Aluminium – abgerundete Kanten; extrem flache Bauform (nur 15 mm); Oberfläche pulverbeschichtet; werkzeuglos höhenverstellbare Seilabhängung; komfortables, werkzeugloses Schnellmontagesystem; inkl. Einspeiseleitung; direkte Lichtverteilung durch LGP-Body (Light-Guiding-Prism); seitlich eingekoppeltes Licht durch Lasergravur nach unten gelenkt; Indirektlichtanteil mit eigenen Platinen für erhöhten Lichtstrom und maximale Deckenaufhellung; absolut homogene Ausleuchtung; energieeff. LEDs – sehr gute Farbwiedergabe; Baldachin für Weiterverdrahtung; optional Akustikelemente erhältlich

Quickinfo

4000 K
 CRI ≥ 90, 3 SDCM
 UGR ≤ 19 / 65° ≤ 3000 cd/m²
 up to 117 lm/W
 L95 @ 50 000 h
 DALI-2
 microprismatic (UGR ≤ 19)

acoustic elements
 PET felt
 ♻️ from recycled material
 up to absorption class A
 🔥 available as B-s1, d0

Types




Luminaire colours



Acoustic colours




Light distribution




DiiA® standards
 251, 252, 253




click-system



DIN EN 12464-1
 UGR ≤ 19



acoustic elements



CRI ≥ 98
 XPECTRUM

Order options

COLOUR TEMPERATURE

4000 K

CONTROL

DALI-2

LUMINAIRE COLOUR

- pure white RAL 9010 7
- jet black RAL 9005 8

ACOUSTIC COLOUR

- white W
- marble grey D
- felt grey G
- black L
- special colours p. 992 X

LIGHT OPTIC COVER

microprismatic (UGR ≤ 19)



Options on request

COLOUR RENDERING INDEX

CRI ≥ 80
CRI ≥ 98 XPECTRUM

FORM

for other configurations see
TASK S suspended system

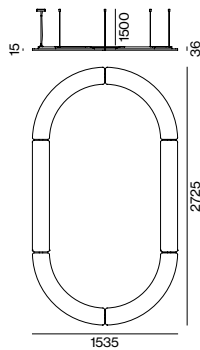

TASK circle suspended



DIRECT / INDIRECT POWER

| SYSTEM POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|--------------|--------------|---------------------|--|
| 169 W | 4000 K | ↓ 12900 / ± 6870 lm | 059-528113 <input checked="" type="checkbox"/> K |


TASK long circle suspended



DIRECT / INDIRECT POWER

| SYSTEM POWER | COLOUR TEMP. | LUMINOUS FLUX | ORDER CODE |
|--------------|--------------|----------------------|--|
| 252 W | 4000 K | ↓ 20200 / ± 10460 lm | 059-528213 <input checked="" type="checkbox"/> K |

Technical data



TASK long circle
252 W, 4000 K, direct/indirect power

ROOM VALUES

| | |
|--------------------|-----------------|
| Room dimensions | 5,4 × 4 × 2,8 m |
| Reflection factor | 0.7 0.5 0.2 |
| Maintenance factor | 0.8 |
| Suspension height | 2.25 m |

CALCULATION SURFACE

| | |
|---------------------------------------|-------------|
| Surface dimensions | 3.2 × 1.2 m |
| Surface height | 0.75 m |
| Average illuminance (E _m) | > 500 lx |
| Uniformity (U ₀) | > 0.6 |


GLARE EVALUATION

Table Classification X=4H | Y=8H | S=0.25H

| | |
|-----------------|------|
| UGR transversal | ≤ 19 |
| UGR axial | ≤ 19 |



Light distribution



microprismatic
direct/indirect power

LUMINOUS FLUX value calculated for
CRI ≥ 90, colour white, cover microprismatic

Acoustic elements

TASK ACOUSTIC inlay

| TYPE | L-W-H (mm) | ORDER CODE |
|------------------------------|--------------|--|
| 1 TASK circle suspended | 1155-1155-30 | 059-579736 <input checked="" type="checkbox"/> |
| 2 TASK long circle suspended | 1155-2346-30 | 059-579738 <input checked="" type="checkbox"/> |

