

# MOVE IN 45 flex round

trimless

063-8221417F 063-8812117 002-90724



Project / Type
Notes
Count / Date



## General

Ceiling , Semi-Recessed
tilt max 90°
rotation 360°
white , RAL9016 <sup>1</sup>
IP20
1230 lm

## LED

2700 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R <sub>g</sub> : 99 , R <sub>f</sub> : 91 , R <sub>(1-15)</sub> : 89
MR 0.53
MDER 0.48

## Optical

flood
beam angle 36°
PstLM ≤ 1.0 <sup>2</sup>
SVM ≤ 0.4 <sup>2</sup>

## Electrical

non DIM
system 15.9 W
inset 13.5 W
36 Vf
400 mA
PC2 220-240V
system 77 lm/W <sup>3</sup>
inset 91 lm/W <sup>4</sup>

## Physical

trimless
diameter 75 mm
height 106 mm
0.53 kg

## Cutout

diameter 65 mm
min. ceiling thickness 9 mm
max. ceiling thickness 25 mm
recessed depth 200 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> incl. optical losses and the efficiency of the operating device (converter)  
<sup>4</sup> incl. optical losses


## Light distribution



flood 36°

h (m)	E0° (lx)	ø (m)
1	3660	0.65
2	920	1.29
3	410	1.94
4	230	2.59
5	150	3.23

## Product drawing

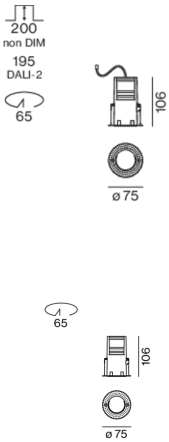

## Installation instructions



## Lighting calculator

