

# TASK ACOUSTIC 1200 half square


suspended  
059-579226X



Project / Type


Notes

Count / Date

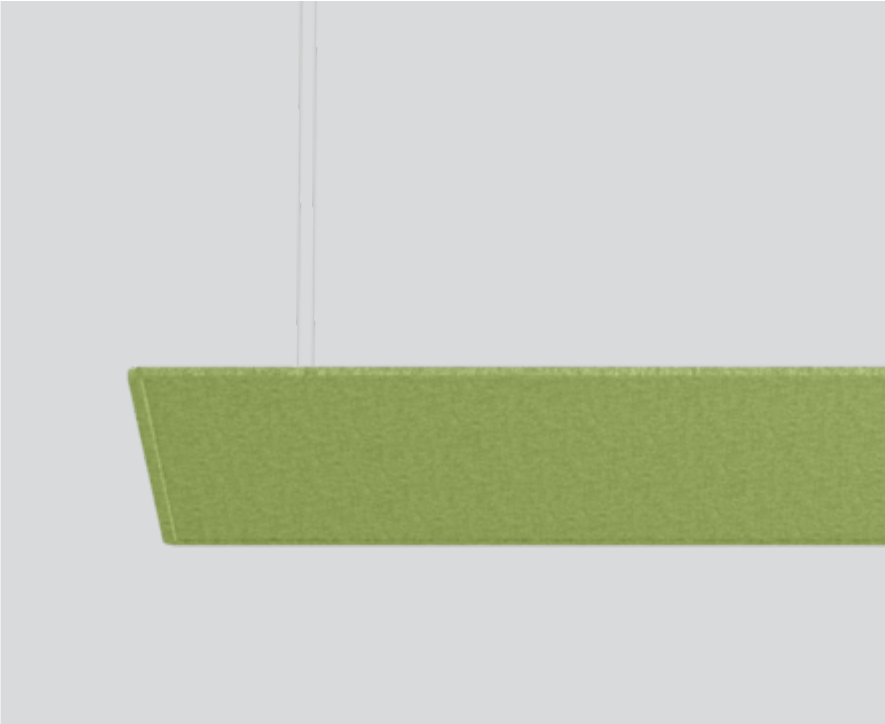

Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; rectangular design; high quality visual and tactile surface, acoustic special colours; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

## Product drawing



General

Ceiling , Suspended

acoustic special colours

Physical

panel only

length 1155 mm

width 573 mm

height 30 mm

2.4 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.95 <sup>1</sup>

SAC (sound absorption class) up to A <sup>1</sup>

NRC up to 0.95 <sup>1</sup>

SAA up to 0.91 <sup>1</sup>

<sup>1</sup> Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 20cm

## Installation instructions



TASK ACOUSTIC 1200 half square

suspended

059-579226X



Project / Type

Notes

Count / Date

Equivalent sound absorption area ( $A_{eq}$ )

| 125 HZ | 250 HZ | 500 HZ | 1000 HZ | 2000 HZ | 4000 HZ |
|--------|--------|--------|---------|---------|---------|
| 0.43   | 0.4    | 0.73   | 0.97    | 1.1     | 1.2     |

Sound absorption coefficient ( $\alpha_p$ )

