

TASK ACOUSTIC 1200

square

suspended


059-579216D



Project / Type

Notes

Count / Date

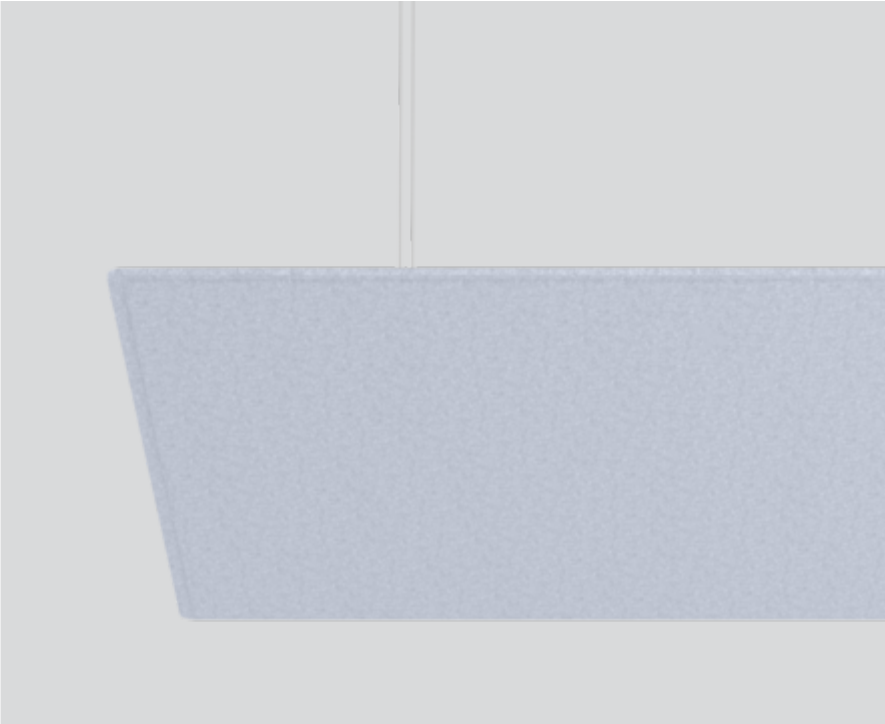

General

Ceiling , Suspended

marble grey

Physical

panel only

length 1155 mm

width 1155 mm

height 30 mm

4.2 kg

Acoustics

Alpha w ( $\alpha_w$ ) up to 0.95 <sup>1</sup>

SAC (sound absorption class) up to A <sup>1</sup>

NRC up to 0.95 <sup>1</sup>

SAA up to 0.91 <sup>1</sup>


<sup>1</sup> Acoustic data calculations based on TASK ACOUSTIC 1200 half square, cavity 20cm

Installation instructions



Acoustic element made of high quality, self-supporting PET felt with sound absorbing properties, consisting of at least 50 % post-consumer recycled PET; square design; high quality visual and tactile surface, marble grey; colour may deviate; direct sound is absorbed by the front-mounted fleece, sound reflected from the ceiling/wall by an additional, rear-mounted fleece; this creates high acoustic performance; pendant fitting with 1500mm cable suspension; toolless suspension height adjustment of the acoustic element;

Product drawing



TASK ACOUSTIC 1200

square

suspended

059-579216D



Project / Type

Notes

Count / Date

Equivalent sound absorption area ( $A_{eq}$ )

125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ
0.73	1	1.53	1.9	2.2	2.4

Sound absorption coefficient ( $\alpha_p$ )

