

MOVE IN 32 round

trimless

063-8111518F 063-8811117 002-90743



Project / Type
Notes
Count / Date



General

Ceiling , Semi-Recessed
black , RAL9005 ¹
IP20
795 lm

LED

3000 K
CRI ≥ 90
L80 / 50000 h
initial MacAdam ≤ 2 SDCM
R _g : 100 , R _f : 91 , R _{f(1-15)} : 88
MR 0.59
MDER 0.53

Optical

flood
beam angle 34°
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
system 11.7 W
inset 8.7 W
36 Vf
250 mA
PC2 220-240V
system 68 lm/W ³
inset 91 lm/W ⁴
1 DALI Addr.

Physical


trimless
diameter 63 mm
height 92 mm
0.5 kg

Cutout

diameter 54 mm
min. ceiling thickness 9 mm
max. ceiling thickness 25 mm
recessed depth 110 mm

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)
⁴ incl. optical losses


Light distribution



flood 34°

h (m)	E0° (lx)	ø (m)
1	2590	0.61
2	650	1.21
3	290	1.82
4	160	2.42
5	100	3.03

Product drawing

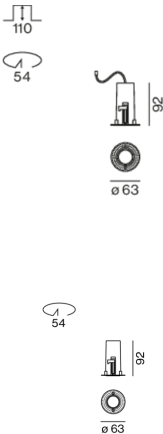

Installation instructions



Lighting calculator

