

# MOVE IN 32 round

trimless

063-8111518F 063-8811117 002-90742



Project / Type \_\_\_\_\_

Notes \_\_\_\_\_

Count / Date \_\_\_\_\_



## General

Ceiling , Semi-Recessed \_\_\_\_\_

black , RAL 9005 <sup>1</sup> \_\_\_\_\_

IP20 \_\_\_\_\_

795 lm \_\_\_\_\_

fixture 91 lm/W<sup>2</sup> \_\_\_\_\_

## LED

3000 K \_\_\_\_\_

CRI ≥ 90 \_\_\_\_\_

L80 / 50000 h \_\_\_\_\_

initial MacAdam ≤ 2 SDCM \_\_\_\_\_

R<sub>g</sub>: 100 , R<sub>f</sub>: 91 , R<sub>f(1-15)</sub>: 88 \_\_\_\_\_

MR 0.59 \_\_\_\_\_

MDER 0.53 \_\_\_\_\_

## Optical

flood \_\_\_\_\_

beam angle 34° \_\_\_\_\_

PstLM ≤ 1.0 <sup>3</sup> \_\_\_\_\_

SVM ≤ 0.4 <sup>3</sup> \_\_\_\_\_

## Electrical

non DIM \_\_\_\_\_

220-240 V \_\_\_\_\_

system 11.7 W \_\_\_\_\_

fixture 8.7 W \_\_\_\_\_

36 V<sub>f</sub> \_\_\_\_\_

250 mA \_\_\_\_\_

PC2 \_\_\_\_\_

## Physical

trimless \_\_\_\_\_

diameter 63 mm \_\_\_\_\_

height 92 mm \_\_\_\_\_

0.35 kg \_\_\_\_\_

## Cutout

diameter 54 mm \_\_\_\_\_

min. ceiling thickness 9 mm \_\_\_\_\_

max. ceiling thickness 25 mm \_\_\_\_\_


recessed depth 110 mm \_\_\_\_\_

<sup>1</sup> RAL code

<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

<sup>3</sup> Value of containing product at full load (undimmed)


## Light distribution



flood 34°

h (m)	E0° (lx)	ø (m)
1	2590	0.61
2	650	1.21
3	290	1.82
4	160	2.42
5	100	3.03

## Product drawing

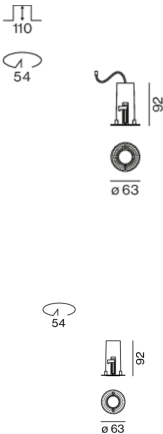

## Installation instructions



## Lighting calculator

