


TASK S direct / indirect soft

suspended

059-5254138K



Project / Type
Notes
Count / Date

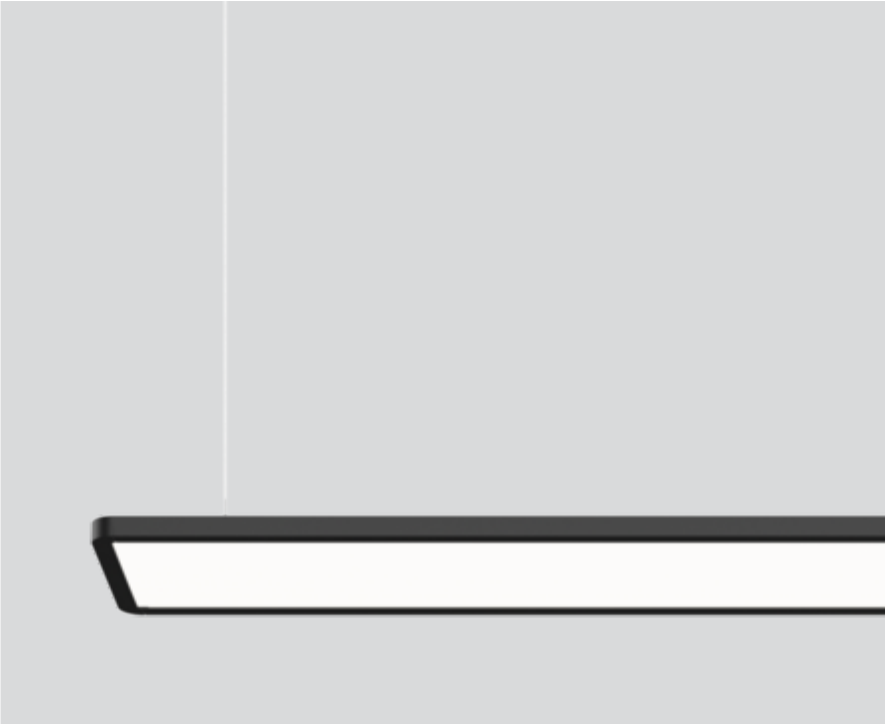

General

Ceiling , Suspended
black , RAL 9005 ¹
IP20
indirect 347 lm
direct 2020 lm
total 2370 lm

LED

4000 K
CRI ≥ 90
L90 / 50000 h
initial MacAdam ≤ 3 SDCM
R _g : 96 , R _f : 90 , R _{t(1-15)} : 87
MR 0.75
MDER 0.68

Optical

Microprismatic
microprismatic
UGR ≤ 19 , ≥65° <3000 cd/m ²
P _{stLM} ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical


DALI-2
220-240 V
system 19.5 W
system 122 lm/W ³
PC1
1 DALI Addr.

Physical

cable 1500 mm
length 1180 mm
width 180 mm
height 34 mm
3.5 kg

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Light distribution



Product drawing



Installation instructions



Lighting calculator

