

# LINEA opal / 1 spot

wall

058-6178D48CH



Project / Type

Notes

Count / Date



## General

Wall , Surface

black , RAL 9005 <sup>1</sup>

IP20

indirect 4030 lm

direct 4030 lm

total 8060 lm

3350 lm/m

tilt max 89°

141 lm

## LED

3000 K<sup>2</sup>-tunable white<sup>3</sup>

2700 K - 5000 K

CRI ≥ 90

L80 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 100<sup>2</sup>-99<sup>3</sup> , R<sub>f</sub>: 91<sup>2</sup>-90<sup>3</sup> , R<sub>f(1-15)</sub>: 88

MR 0.59<sup>2</sup>-0.53<sup>3</sup>

MDER 0.53<sup>2</sup>-0.48<sup>3</sup>

## Optical

High Performance Opal

flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

PstLM ≤ 1.0<sup>3</sup> 2 4

SVM ≤ 0.4<sup>3</sup> 2 4

beam angle 23°

## Electrical

DALI-2 / switch (only spotlights)<sup>2</sup>-DALI-2 DT8 / switch (only spotlights)<sup>3</sup>

220-240 V

system 2.2<sup>2</sup>-83<sup>3</sup> W

system 64<sup>2</sup>-97<sup>3</sup> lm/W<sup>5</sup>

PC1

1 DALI Addr.

35 W/m

## Physical

length 2510 mm

width 40 mm

height 100 mm

right

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear

<sup>4</sup> Value of containing product at full load (undimmed)


<sup>5</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,2 W / 141 lm / 3000 K right, incl. switch; incl. DALI-2 / DT8 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

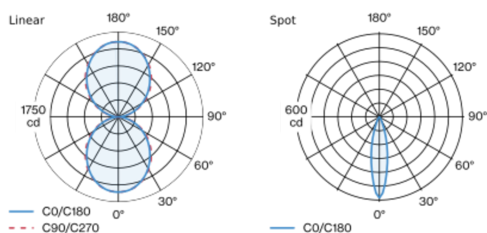


flood 23°

Spot

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 584      | 0.41  |
| 2     | 146      | 0.83  |
| 3     | 65       | 1.24  |
| 4     | 37       | 1.65  |
| 5     | 23       | 2.07  |

## Product drawing



# LINEA opal / 1 spot

wall  
058-6178D48CH



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF               | 0.96   | 0.92   | 0.88   | 0.85   | 0.81   |
| LSF                | 1      | 1      | 1      | 1      | 1      |

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF<sup>a</sup>

Luminaire Maintenance Factor

RSMF<sup>a</sup>

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 80                 |
| B13                            | 104                |
| B16                            | 130                |
| B20                            | 162                |
| C10                            | 135                |
| C13                            | 175                |
| C16                            | 220                |
| C20                            | 270                |

