

# TASK 600 square direct

suspended


059-221203XK



Project / Type

Notes

Count / Date

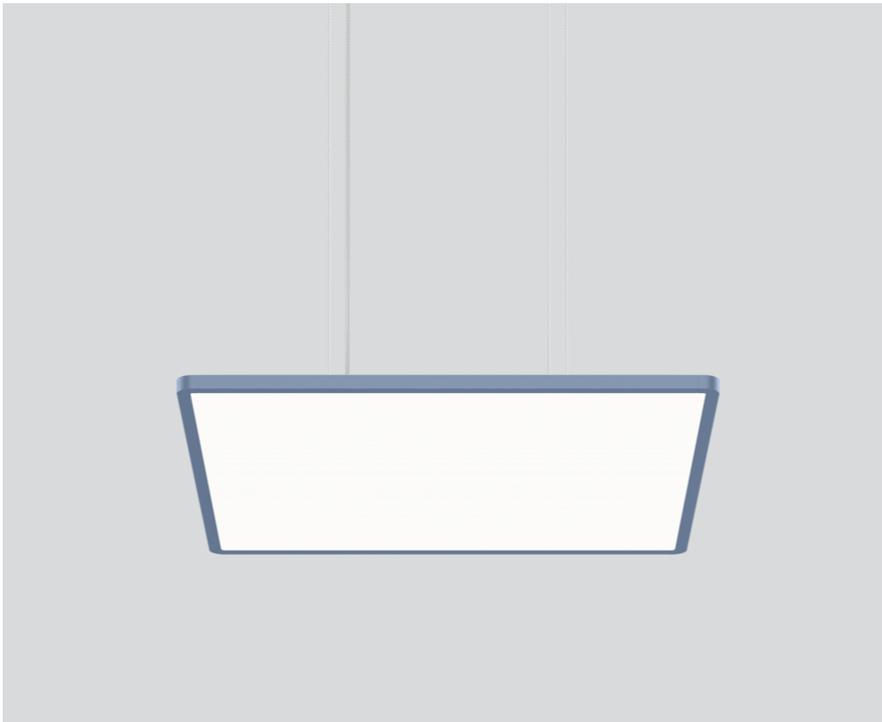

## General

Ceiling , Suspended

special colours

IP20

3510 lm

## LED

3000 K

CRI  $\geq$  90

L90 / 50000 h

initial MacAdam  $\leq$  3 SDCM

R<sub>g</sub>: 96 , R<sub>f</sub>: 90 , R<sub>(1-15)</sub>: 90

MR 0.61

MDER 0.56

## Optical

Microprismatic

microprismatic

UGR  $<$  19 ,  $\geq$ 65°  $<$ 3000 cd/m<sup>2</sup>

PstLM  $\leq$  1.0<sup>1</sup>

SVM  $\leq$  0.4<sup>1</sup>

## Electrical

DALI-2

220-240 V

system 27.3 W

system 129 lm/W<sup>2</sup>

PC1

1 DALI Addr.

## Physical

cable 1500 mm

length 600 mm


width 600 mm

height 41 mm


5.4 kg

square luminaire housing with rounded edges in aluminium; extremely flat design (only 15mm); modern shape in an elegant design for high demands; surface special colours powder coated; suspended luminaire with 1500mm cable suspension (4 cables); with integrated toolless suspension height adjustment on the luminaire; incl. feed (white); direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; microprismatic PMMA cover; completely homogeneous illumination; same light density for all surface lights with the same components; UGR  $\leq$  19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq$  3000 cd/m<sup>2</sup>; light colour 3000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; canopy with 2 cable openings and plug-in terminal for through wiring; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; sound absorbing accessories available; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions



## Lighting calculator



# TASK 600 square direct

suspended

059-221203XK



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.97	0.95	0.93	0.92
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	13
B13	20
B16	24
B20	30
C10	26
C13	40
C16	48
C20	60

## Acoustic accessories

### TASK ACOUSTIC inlay TASK angular suspended

COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
marble grey	1155-1155-30	059-579716D
felt grey	1155-1155-30	059-579716G
black	1155-1155-30	059-579716L
white	1155-1155-30	059-579716W
acoustic special colours	1155-1155-30	059-579716X

