


TASK 450 square direct

suspended

059-2211138K




Project / Type	
Notes	
Count / Date	

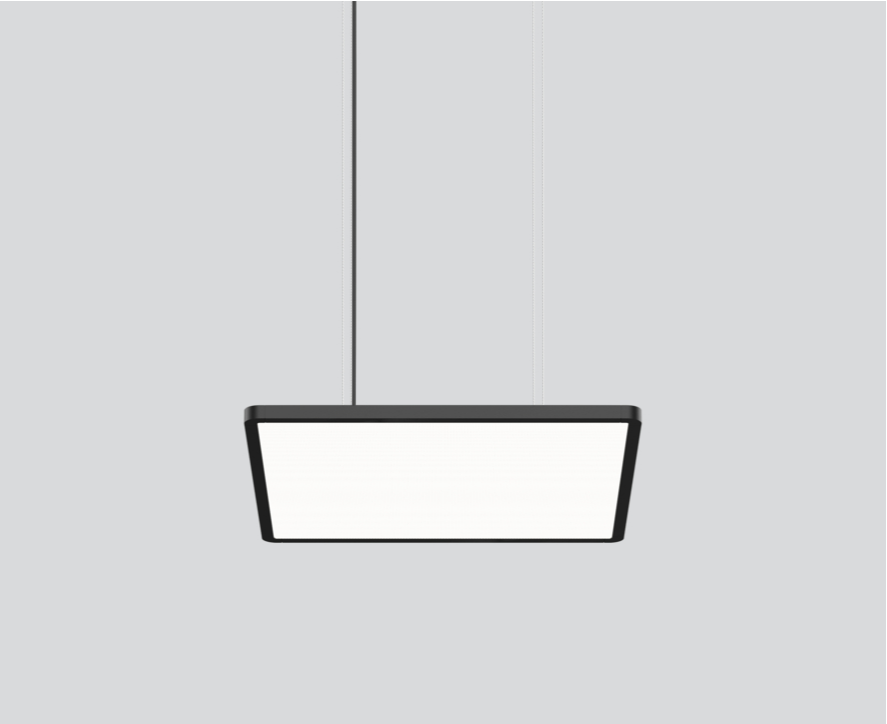


square luminaire housing with rounded edges in aluminium; extremely flat design (only 15mm); modern shape in an elegant design for high demands; surface black powder coated; suspended luminaire with 1500mm cable suspension (4 cables); with integrated toolless suspension height adjustment on the luminaire; incl. feed (black); direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; microprismatic PMMA cover; completely homogeneous illumination; same light density for all surface lights with the same components; UGR ≤ 19 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 3000 \text{ cd/m}^2$; light colour 4000 K; binning initial MacAdam $\leq 3 \text{ SDCM}$; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; canopy with 2 cable openings and plug-in terminal for through wiring; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; sound absorbing accessories available; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling , Suspended	
black , RAL 9005 ¹	
IP20	
2000 lm	

LED

4000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam $\leq 3 \text{ SDCM}$	
R _g : 96 , R _f : 90 , R ₍₁₋₅₎ : 87	
MR 0.75	
MDER 0.68	

Optical

Microprismatic	
microprismatic	
UGR < 19 , $\geq 65^\circ < 3000 \text{ cd/m}^2$	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

DALI-2	
220-240 V	
system 15.0 W	
system 133 lm/W ³	
PC1	
1 DALI Addr.	

Physical

cable 1500 mm	
length 450 mm	
width 450 mm	
height 41 mm	
4 kg	

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

