

LINEA opal / 1 spot

wall

058-6178D37CH



Project / Type

Notes

Count / Date



RG0
IEC 62471

220-240V

X-PERT

X-PERT

General

Wall , Surface

tilt max 89°

white , RAL9010 ¹

IP20

172 lm

LED

3000 K²-tunable white³

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R_g: 92²-99³ , R_f: 86²-90³ , R_(f-l-15): 94²-88³

MR 0.53

MDER 0.48

2700 K - 5000 K

Optical

flood²-opal (lambertsch)³

beam angle 30°

PstLM ≤ 1.0 ⁴

SVM ≤ 0.4 ⁴

High Performance Opal

Electrical

DALI-2²-DALI-2 DT8³

system 2.7²-83³ W

PC1 220-240V

system 64²-97³ lm/W⁵

1 DALI Addr.

Physical

length 2510 mm

width 40 mm

height 100 mm


right

¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)


⁵ incl. optical losses and the efficiency of the operating device (converter)

Light distribution

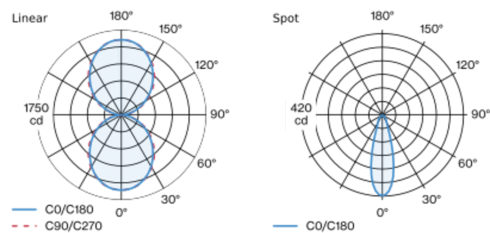

flood 30°		Spot
h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



Installation instructions



LINEA opal / 1 spot

wall
058-6178D37CH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	9
B13	12
B16	15
B20	19
C10	15
C13	20
C16	25
C20	32

