

# TASK 600 square direct

surface


059-214213XK



Project / Type

Notes

Count / Date

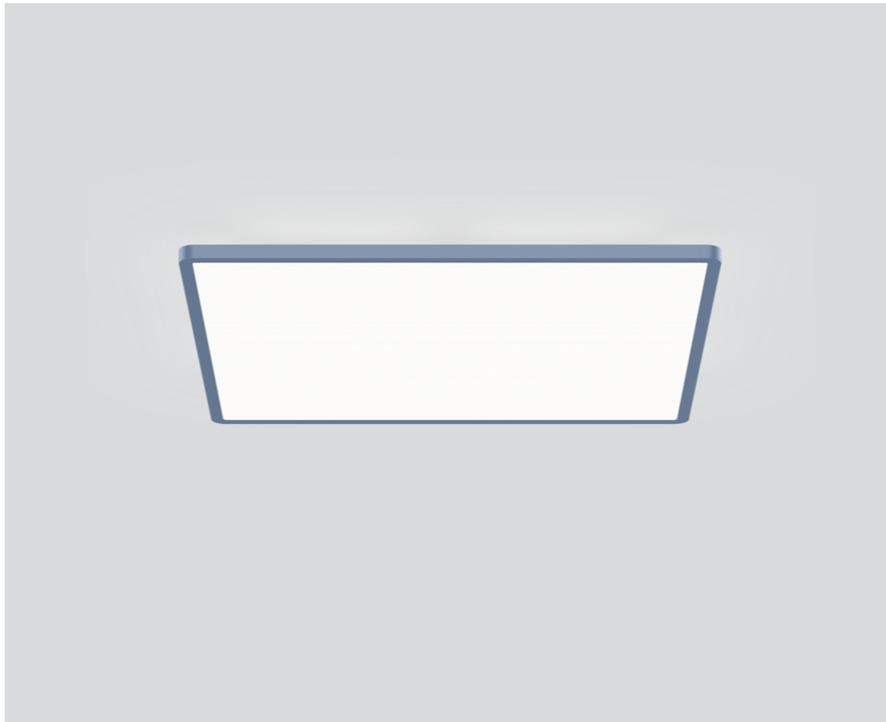

## General

Ceiling / Wall , Surface

special colours

IP20

3730 lm

## LED

4000 K

CRI  $\geq$  90

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam  $\leq$  3 SDCM

R<sub>g</sub>: 96 , R<sub>r</sub>: 90 , R<sub>r(1-15)</sub>: 87

MR 0.75

MDER 0.68

## Optical

Microprismatic

microprismatic

UGR  $<$  19 ,  $\geq$ 65°  $<$ 3000 cd/m<sup>2</sup>

PstLM  $\leq$  1.0<sup>1</sup>

SVM  $\leq$  0.4<sup>1</sup>

## Electrical

DALI-2

system 27.3 W

PC1 220-240V

system 137 lm/W<sup>2</sup>

1 DALI Addr.

## Physical

length 600 mm


width 600 mm

height 46 mm


6 kg

square luminaire housing with rounded edges in aluminium; extremely flat design (only 15mm); modern shape in an elegant design for high demands; surface special colours powder coated; suitable for wall or ceiling mounting; convenient quick mounting system without tools; direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; microprismatic PMMA cover; completely homogeneous illumination; same light density for all surface lights with the same components; UGR  $\leq$  19; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above 65°  $\leq$  3000 cd/m<sup>2</sup>; light colour 4000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; luminaire with 2 cable openings and plug-in terminals for through wiring; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. DALI-2 converter; sound absorbing accessories available; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution



## Product drawing



<sup>1</sup> Value of containing product at full load (undimmed)

<sup>2</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions

