

LINEA opal / 2 spots

wall

058-6178648DH



Project / Type

Notes

Count / Date



RG0
IEC 62471

220-240V

X-PERT

X-PERT

General

Wall , Surface

tilt max 89°

black , RAL9005 ¹

IP20

282 lm

LED

3000 K²-4000 K³

CRI ≥ 90

L80 / 50000 h²-L85 / 50000 h³

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R_g: 100²-98³, R_f: 91²-90³, R_{f(1-5)}: 88

MR 0.59²-0.76³

MDER 0.53²-0.69³

Optical

flood²-opal (lambertsch)³

beam angle 23°

PstLM ≤ 1.0 ⁴

SVM ≤ 0.4 ⁴

High Performance Opal

Electrical

DALI-2 / switch (only spotlights)

system 4.5²-70³ W


PC1 220-240V

system 63²-110³ lm/W⁵

1 DALI Addr.

Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/ indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; 2x JUST 26 spotlight module 2,2 W / 141 lm / 3000 K (1x left, 1x right), incl. switch; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;


Light distribution

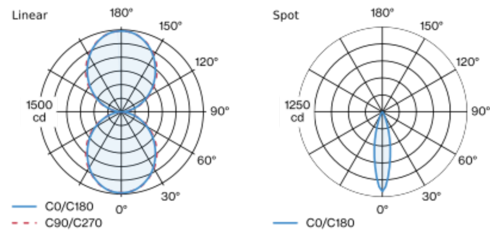

flood 23° Spot

h (m)	E0° (lx)	ø (m)
1	584	0.41
2	146	0.83
3	65	1.24
4	37	1.65
5	23	2.07

Product drawing



Physical

length 2610 mm

width 40 mm

height 100 mm

¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



[058-6178648DH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

LINEA opal / 2 spots

wall
058-6178648DH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF^a

Luminaire Maintenance Factor

RSMF^a

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	9
B13	12
B16	15
B20	19
C10	15
C13	20
C16	25
C20	31

