


# TASK long angular direct / indirect power

suspended

059-5284138K




Project / Type	
Notes	
Count / Date	

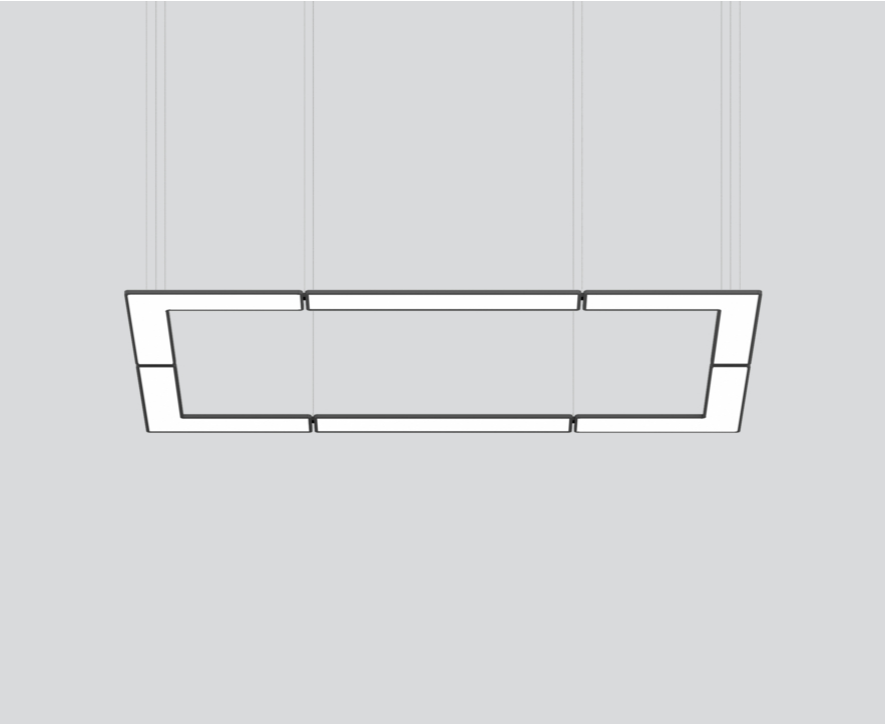

Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; luminaire housing with rounded edges in aluminium; extremely flat design (only 15mm); modern shape in elegant design for discerning requirements; surface black powder coated; luminaire with 1500 mm cable suspension; with integrated toolless suspension height adjustment on the luminaire; incl. feed (black); direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; microprismatic PMMA cover; completely homogeneous illumination; light colour 4000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; canopy with 2 cable openings and plug-in terminal for through wiring; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Product drawing



### General

Ceiling , Suspended  
black , RAL 9005 <sup>1</sup>  
IP20

### LED

4000 K  
CRI  $\geq 90$   
initial MacAdam  $\leq 3$  SDCM  
 $R_g: 96, R_f: 90, R_{t(1-15)}: 87$   
MR 0.75  
MDER 0.68

### Optical

Microprismatic  
microprismatic  
 $P_{stLM} \leq 1.0$  <sup>2</sup>  
 $SVM \leq 0.4$  <sup>2</sup>

### Electrical

DALI-2  
220-240 V  
PC1  
10 DALI Addr.

### Physical

cable 1500 mm  
length 2725 mm  
width 1535 mm  
height 36 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

## Installation instructions

