

TASK long angular direct / indirect power

suspended


059-5284138K



Project / Type _____


Notes _____

Count / Date _____

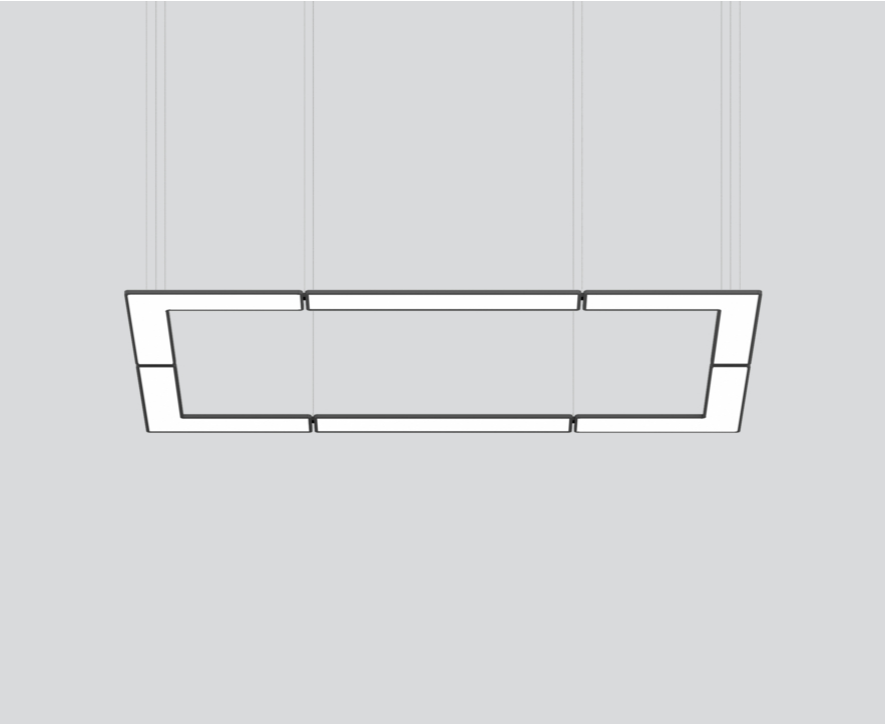

Rectangular suspended luminaire, consisting of single L-shaped or rectangular elements; luminaire housing with rounded edges in aluminium; extremely flat design (only 15mm); modern shape in elegant design for discerning requirements; surface black powder coated; luminaire with 1500 mm cable suspension; with integrated toolless suspension height adjustment on the luminaire; incl. feed (black); direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; indirect light component with special PCBs for increased luminous flux and maximum ceiling illumination; microprismatic PMMA cover; completely homogeneous illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; canopy with 2 cable openings and plug-in terminal for through wiring; degree of protection IP20; PC1; internal wiring in light halogen free; incl. DALI-2 converter; sound absorbing accessories available; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Product drawing



General

Ceiling , Suspended _____
black , RAL9005 ¹ _____
IP20 _____

LED

4000 K _____
CRI ≥ 90 _____
initial MacAdam ≤ 3 SDCM _____
R_g: 96 , R_f: 90 , R_{t(1-15)}: 87 _____
MR 0.75 _____
MDER 0.68 _____

Optical

Microprismatic _____
microprismatic _____
PstLM ≤ 1.0 ² _____
SVM ≤ 0.4 ² _____

Electrical

DALI-2 _____
220-240 V _____
PC1 _____
10 DALI Addr. _____

Physical

cable 1500 mm _____
length 2725 mm _____
width 1535 mm _____
height 36 mm _____

¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions

