


TASK 450 square direct

surface

059-214113XK



Project / Type	
Notes	
Count / Date	

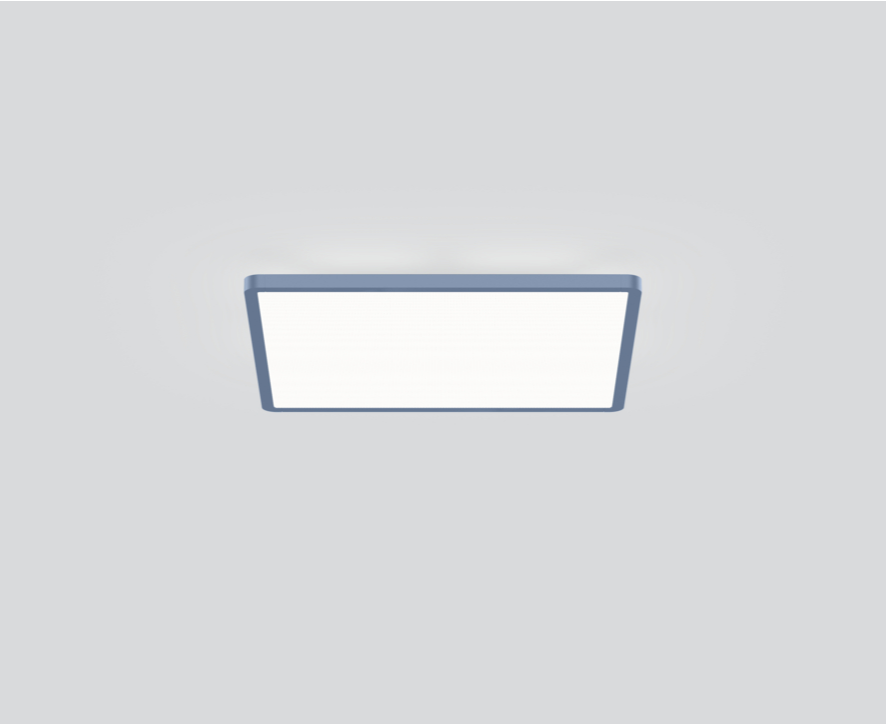

General

Ceiling / Wall , Surface	
special colours	
IP20	
2000 lm	

LED

4000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R _g : 96 , R _f : 90 , R ₍₁₋₁₅₎ : 87	
MR 0.75	
MDER 0.68	

Optical

Microprismatic	
microprismatic	
UGR < 19 , ≥65° <3000 cd/m ²	
PstLM ≤ 1.0 ¹	
SVM ≤ 0.4 ¹	


Electrical

DALI-2	
220-240 V	
system 15.0 W	
system 133 lm/W ²	
PC1	
1 DALI Addr.	


Physical

length 450 mm	
width 450 mm	
height 46 mm	
3.9 kg	

Light distribution



Product drawing



¹ Value of containing product at full load (undimmed)
² FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

