

TASK angular direct / indirect power

suspended


059-5283137K



Project / Type

Notes

Count / Date

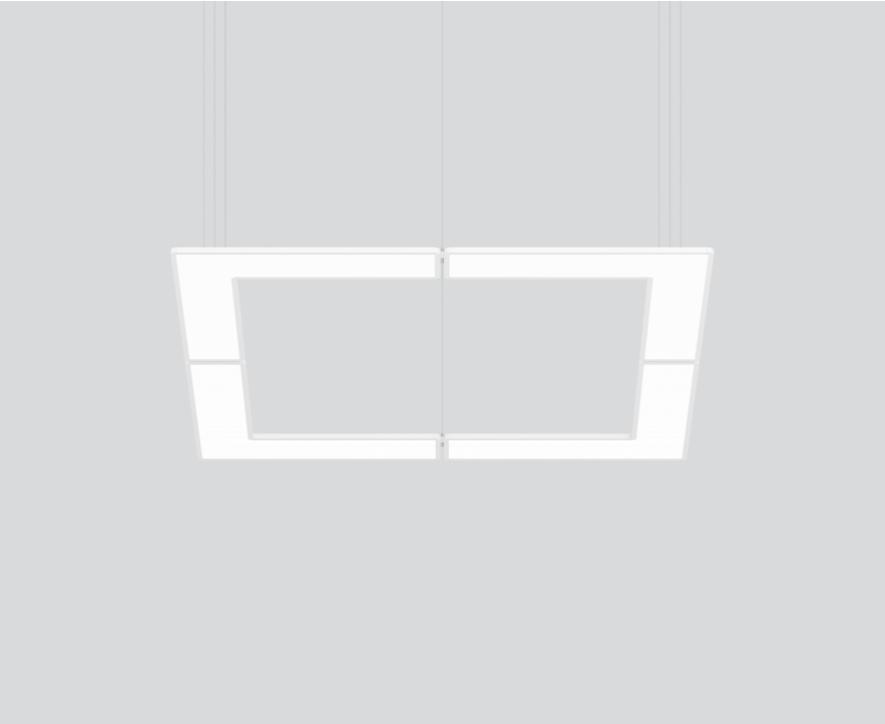

General

Ceiling , Suspended

white , RAL9010 ¹

IP20

indirect 8050 lm

direct 15500 lm

total 23600 lm

LED

4000 K

CRI ≥ 90

L90 / 50000 h

initial MacAdam ≤ 3 SDCM

R_g: 96 , R_f: 90 , R₍₁₋₁₅₎: 87

MR 0.75

MDER 0.68

Optical

Microprismatic

microprismatic

UGR < 19 , ≥65° <3000 cd/m²

P_{stLM} ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

220-240 V

system 197 W

PC1

system 120 lm/W³

8 DALI Addr.

Physical

cable 1500 mm

length 1535 mm


width 1535 mm

height 36 mm


18.9 kg

¹ RAL code ² Value of containing product at full load (undimmed)
³ incl. optical losses and the efficiency of the operating device (converter)

Light distribution



Product drawing



Installation instructions



Lighting calculator

