


# TASK 450 square direct

surface

059-2141138K



Project / Type	
Notes	
Count / Date	

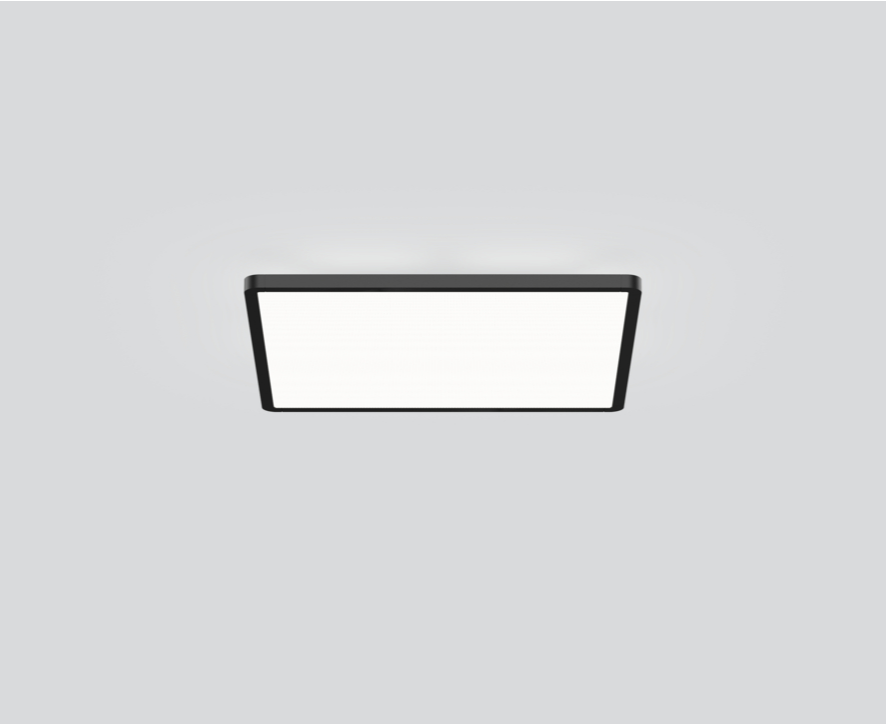

## General

Ceiling / Wall , Surface	
black , RAL 9005 <sup>1</sup>	
IP20	
2000 lm	

## LED

4000 K	
CRI ≥ 90	
L90 / 50000 h	
initial MacAdam ≤ 3 SDCM	
R <sub>g</sub> : 96 , R <sub>f</sub> : 90 , R <sub>(1-15)</sub> : 87	
MR 0.75	
MDER 0.68	

## Optical

Microprismatic	
microprismatic	
UGR < 19 , ≥65° <3000 cd/m <sup>2</sup>	
PstLM ≤ 1.0 <sup>2</sup>	
SVM ≤ 0.4 <sup>2</sup>	


## Electrical

DALI-2	
220-240 V	
system 15.0 W	
system 133 lm/W <sup>3</sup>	
PC1	
1 DALI Addr.	


## Physical

length 450 mm	
width 450 mm	
height 46 mm	
3.9 kg	

## Light distribution



## Product drawing



<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)  
<sup>3</sup> FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

## Installation instructions

