

# LINEA opal / 2 spots

wall

058-6178628DH



Project / Type

Notes

Count / Date



## General

Wall , Surface

black , RAL9005 <sup>1</sup>

3200 lm/m

IP20

indirect 3850 lm

direct 3850 lm

total 7700 lm

tilt max 89°

344 lm

## LED

3000 K<sup>2</sup>-4000 K<sup>3</sup>

CRI ≥ 97<sup>2</sup>-90<sup>3</sup>

L95 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 92<sup>2</sup>-98<sup>3</sup>, R<sub>r</sub>: 86<sup>2</sup>-90<sup>3</sup>, R<sub>t(1-15)</sub>: 94<sup>2</sup>-88<sup>3</sup>

MR 0.53<sup>2</sup>-0.76<sup>3</sup>

MDER 0.48<sup>2</sup>-0.69<sup>3</sup>

## Optical

High Performance Opal

flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

PstLM ≤ 1.0 <sup>4</sup>

SVM ≤ 0.4 <sup>4</sup>

beam angle 30°

## Electrical

non DIM / switch (only spotlights)

system 5.4<sup>2</sup>-70<sup>3</sup> W

PC1 220-240V

system 64<sup>2</sup>-110<sup>3</sup> lm/W<sup>5</sup>

29 W/m

## Physical

length 2610 mm

width 40 mm

height 100 mm

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear

<sup>4</sup> Value of containing product at full load (undimmed)


<sup>5</sup> incl. optical losses and the efficiency of the operating device (converter)

## Installation instructions



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; 2x JUST 26 spotlight module 2,6 W / 159 lm / 3000 K (1x left, 1x right), incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

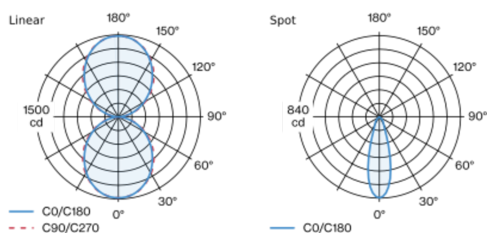


flood 30°

Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

## Product drawing



[058-6178628DH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

03.12.2024

# LINEA opal / 2 spots

wall  
058-6178628DH



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.99	0.99	0.99	0.99	0.99
LSF	1	1	1	1	1

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF<sup>a</sup>

Luminaire Maintenance Factor

RSMF<sup>a</sup>

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	31
B13	40
B16	50
B20	62
B25	78
C10	52
C13	67
C16	85
C20	104
C25	130

