


TASK 1500 direct

ceiling

059-2115D38K




Project / Type	
Notes	
Count / Date	

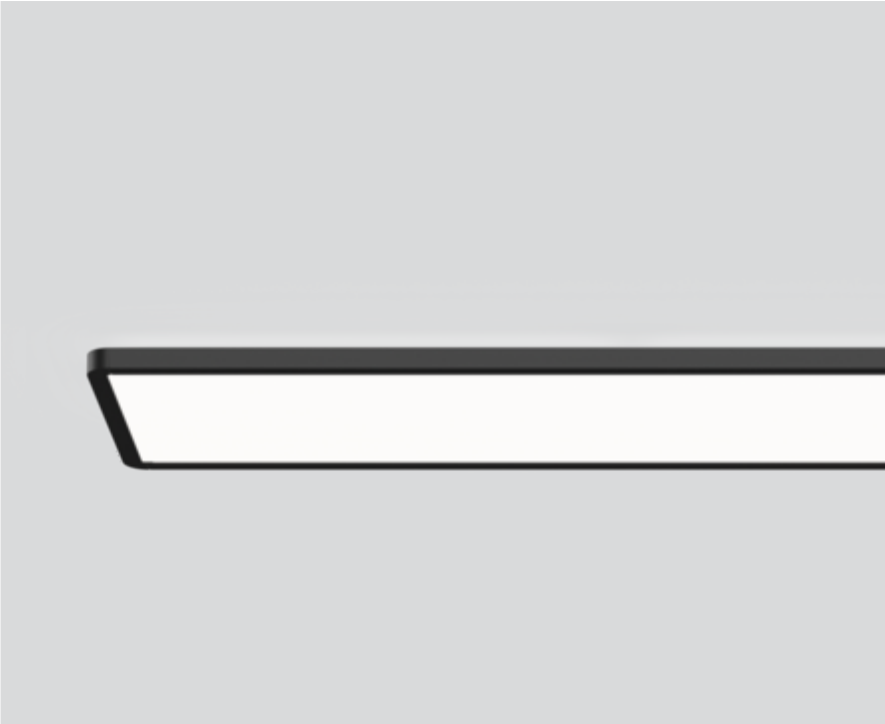


Rectangular luminaire housing with rounded edges in aluminium; extremely flat design (only 15mm); modern shape in elegant design for discerning requirements; surface black powder coated; suitable for wall or ceiling mounting; convenient quick mounting system without tools; direct light distribution through LGP body (Light Guiding Prism); side coupled light directed downwards by laser engraving; light control via highly reflective reflector material; microprismatic PMMA cover; completely homogeneous illumination; same light density for all surface lights with the same components; UGR ≤ 19 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 3000 \text{ cd/m}^2$; light colour: tunable white diodes (2700-6500 K); CRI ≥ 80 ; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; luminaire with 2 cable openings and plug-in terminals for through wiring; degree of protection IP20; PC1; 220-240 V; internal wiring in light halogen free; incl. DALI-2 / DT8 converter; sound absorbing accessories available; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



General

Ceiling , Surface	
black , RAL 9005 ¹	
IP20	
4330 lm	

LED

tunable white	
2700 K - 6500 K	
CRI ≥ 80	
L85 / 50000 h	
MR 1.01	
MDER 0.92	

Optical

Microprismatic	
microprismatic	
UGR < 19 , $\geq 65^\circ < 3000 \text{ cd/m}^2$	
PstLM ≤ 1.0 ²	
SVM ≤ 0.4 ²	

Electrical

DALI-2 DT8	
220-240 V	
system 37 W	
system 117 lm/W ³	
PC1	
1 DALI Addr.	

Physical

length 1520 mm	
width 320 mm	
height 38 mm	
10.5 kg	

¹ RAL code ² Value of containing product at full load (undimmed)
³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Lighting calculator

