

# LINEA opal / 1 spot

wall

058-6174527CH



Project / Type

Notes

Count / Date



## General

Wall , Surface

white , RAL9010 <sup>1</sup>

2890 lm/m

IP20

indirect 1720 lm

direct 1760 lm

total 3480 lm

tilt max 89°

172 lm

## LED

3000 K

CRI  $\geq 97^{2-90^3}$

L95 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

photobio. safety RG 0 - no Risk

initial MacAdam  $\leq 3$  SDCM

R<sub>g</sub>: 92<sup>2-99^3</sup>, R<sub>f</sub>: 86<sup>2-91^3</sup>, R<sub>f(1-15)</sub>: 94<sup>2-89^3</sup>

MR 0.53<sup>2-0.61^3</sup>

MDER 0.48<sup>2-0.55^3</sup>

## Optical

High Performance Opal

flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

PstLM  $\leq 1.0$  <sup>4</sup>

SVM  $\leq 0.4$  <sup>4</sup>

beam angle 30°

## Electrical

non DIM / switch (only spotlights)

2.7<sup>2-35^3</sup> W

PC1 220-240V

64<sup>2-99^3</sup> lm/W

29 W/m

## Physical

length 1310 mm

width 40 mm

height 100 mm

right

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear


<sup>4</sup> Value of containing product at full load (undimmed)

## Installation instructions



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 97$ ; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K right, incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

## Light distribution

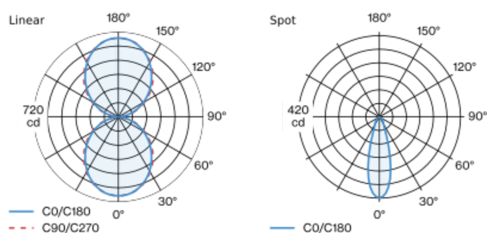


flood 30°

Spot

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1     | 419      | 0.54  |
| 2     | 105      | 1.09  |
| 3     | 47       | 1.63  |
| 4     | 26       | 2.17  |
| 5     | 17       | 2.72  |

## Product drawing



[058-6174527CH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

03.11.2024

# LINEA opal / 1 spot

wall

058-6174527CH



Project / Type

Notes

Count / Date

## Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF               | 0.99   | 0.99   | 0.99   | 0.99   | 0.99   |
| LSF                | 1      | 1      | 1      | 1      | 1      |

|                  |                              |                   |                                 |
|------------------|------------------------------|-------------------|---------------------------------|
| MF               | LMF × RSMF × LLMF × LSF      | RSMF <sup>a</sup> | Room Surface Maintenance Factor |
| MF               | Maintenance Factor           | LLMF              | Lamp Lumens Maintenance Factor  |
| LMF <sup>a</sup> | Luminaire Maintenance Factor | LSF               | Lamp Survival Faktor            |

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10                            | 31                 |
| B13                            | 40                 |
| B16                            | 50                 |
| B20                            | 62                 |
| B25                            | 78                 |
| C10                            | 52                 |
| C13                            | 67                 |
| C16                            | 85                 |
| C20                            | 104                |
| C25                            | 130                |

