

LINEA opal / 2 spots

wall

058-6174D38DH



Project / Type


Notes

Count / Date



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97 ; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; 2x JUST 26 spotlight module 2,6 W / 159 lm / 3000 K (1x left, 1x right); incl. DALI-2 / DT8 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

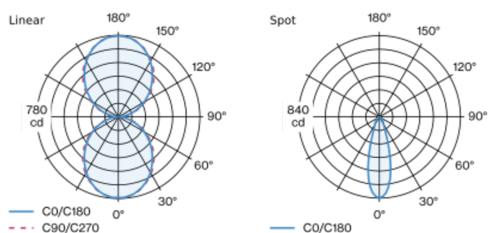


flood 30°

Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



General

Wall , Surface

black , RAL 9005 ¹

IP20

indirect 2020 lm

direct 2020 lm

total 4040 lm

3350 lm/m

tilt max 89°

344 lm

LED

3000 K²-tunable white³

2700 K - 5000 K

CRI $\geq 97^{2-90^3}$

L95 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 92²-99³ , R_r: 86²-90³ , R₍₁₋₁₅₎: 94²-88³

MR 0.53

MDER 0.48

Optical

High Performance Opal

flood²-opal (lambertsch)³

PstLM $\leq 1.0^{3-2-4}$

SVM $\leq 0.4^{3-2-4}$

beam angle 30°

Electrical

DALI-2²-DALI-2 DT8³

220-240 V

system 5.4²-42³ W

system 64²-96³ lm/W⁵

PC1

2²-1³ DALI Addr.

35 W/m

Physical

length 1410 mm

width 40 mm

height 100 mm

¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)

⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



[058-6174D38DH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

06.04.2025