

LINEA opal / 1 spot

wall

058-6174D37BH



Project / Type

Notes

Count / Date



General

Wall , Surface

tilt max 89°

white , RAL 9010 ¹

IP20

172 lm

LED

3000 K²-tunable white³

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 92²-99³ , R_r: 86²-90³ , R_{t(1-15)}: 94²-88³

MR 0.53

MDER 0.48

2700 K - 5000 K

Optical

flood²-opal (lambertsch)³

beam angle 30°

PstLM ≤ 1.0² 3 4

SVM ≤ 0.4² 3 4

High Performance Opal

Electrical

DALI-2²-DALI-2 DT8³

220-240 V

system 2.7²-42³ W

system 64²-96³ lm/W⁵

PC1

1 DALI Addr.

Physical

length 1310 mm

width 40 mm

height 100 mm

left


¹ RAL code ² Spot ³ Linear
⁴ Value of containing product at full load (undimmed)
⁵ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour: tunable white diodes (2700-5000 K); binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1; 220-240 V; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K left; incl. DALI-2 / DT8 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

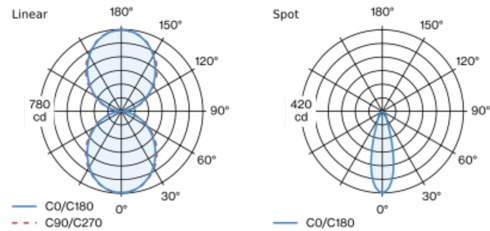

flood 30° Spot

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 419 | 0.54 |
| 2 | 105 | 1.09 |
| 3 | 47 | 1.63 |
| 4 | 26 | 2.17 |
| 5 | 17 | 2.72 |

Product drawing

