

# LINEA opal / 1 spot

wall

058-6172D37BH



Project / Type

Notes

Count / Date



### General

Wall , Surface

tilt max 89°

white , RAL 9010 <sup>1</sup>

IP20

172 lm

### LED

3000 K<sup>2</sup>-tunable white<sup>3</sup>

CRI ≥ 97<sup>2</sup>-90<sup>3</sup>

L95 / 50000 h<sup>2</sup>-L85 / 50000 h<sup>3</sup>

initial MacAdam ≤ 3 SDCM

R<sub>g</sub>: 92<sup>2</sup>-99<sup>3</sup> , R<sub>r</sub>: 86<sup>2</sup>-90<sup>3</sup> , R<sub>t(1-15)</sub>: 94<sup>2</sup>-88<sup>3</sup>

MR 0.53

MDER 0.48

2700 K - 5000 K

### Optical

flood<sup>2</sup>-opal (lambertsch)<sup>3</sup>

beam angle 30°

PstLM ≤ 1.0<sup>2</sup> 3 4

SVM ≤ 0.4<sup>2</sup> 3 4

High Performance Opal

### Electrical

DALI-2<sup>2</sup>-DALI-2 DT8<sup>3</sup>

220-240 V

system 2.7<sup>2</sup>-20.9<sup>3</sup> W

system 64<sup>2</sup>-97<sup>3</sup> lm/W<sup>5</sup>

PC1

1 DALI Addr.

### Physical

length 710 mm

width 40 mm

height 100 mm

2 kg


left

<sup>1</sup> RAL code <sup>2</sup> Spot <sup>3</sup> Linear

<sup>4</sup> Value of containing product at full load (undimmed)

<sup>5</sup> incl. consideration of optical losses, internal control unit losses & operating device efficiency


### Light distribution

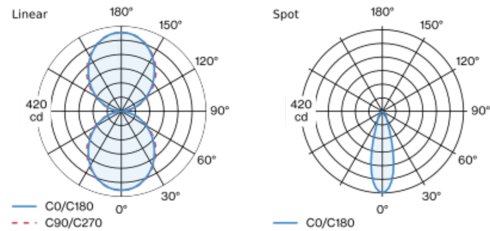

flood 30° Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

### Product drawing



### Installation instructions



[‘058-6172D37BH’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

# LINEA opal / 1 spot

wall

058-6172D37BH



Project / Type

Notes

Count / Date

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1

MF

LMF × RSMF × LLMF × LSF

MF

Maintenance Factor

LMF<sup>a</sup>

Luminaire Maintenance Factor

RSMF<sup>a</sup>

Room Surface Maintenance Factor

LLMF

Lamp Lumens Maintenance Factor

LSF

Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	13
B13	16
B16	22
B20	27
C10	21
C13	28
C16	36
C20	45

