

LINEA opal / 1 spot

wall

058-6172D37BH



Project / Type

Notes

Count / Date



General

Wall , Surface

tilt max 89°

white , RAL 9010 ¹

IP20

172 lm

LED

3000 K²-tunable white³

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

initial MacAdam ≤ 3 SDCM

R_g: 92²-99³ , R_r: 86²-90³ , R_{t(1-15)}: 94²-88³

MR 0.53

MDER 0.48

2700 K - 5000 K

Optical

flood²-opal (lambertsch)³

beam angle 30°

PstLM ≤ 1.0² 3 4

SVM ≤ 0.4² 3 4

High Performance Opal

Electrical

DALI-2²-DALI-2 DT8³

220-240 V

system 2.7²-20.9³ W

system 64²-97³ lm/W⁵

PC1

1 DALI Addr.

Physical

length 710 mm

width 40 mm

height 100 mm

2 kg


left

¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)


⁵ incl. consideration of optical losses, internal control unit losses & operating device efficiency

Light distribution

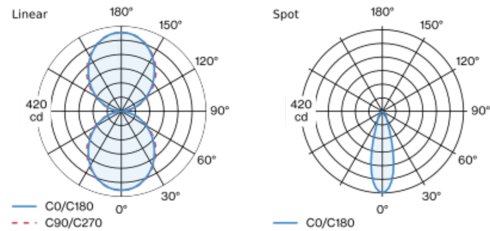

flood 30°		Spot
h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



Installation instructions



[“058-6172D37BH”] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.

© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com