

LINEA opal / 2 spots

wall

058-6174627DH



Project / Type

Notes

Count / Date



General

Wall , Surface

white , RAL9010 ¹

3190 lm/m

IP20

indirect 1900 lm

direct 1940 lm

total 3840 lm

tilt max 89°

344 lm

LED

3000 K²-4000 K³

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R_g: 92²-98³, R_r: 86²-90³, R₍₁₋₁₅₎: 94²-88³

MR 0.53²-0.76³

MDER 0.48²-0.69³

Optical

High Performance Opal

flood²-opal (lambertsch)³

PstLM ≤ 1.0 ⁴

SVM ≤ 0.4 ⁴

beam angle 30°

Electrical

non DIM / switch (only spotlights)

system 5.4²-35³ W

PC1 220-240V

system 64²-110³ lm/W⁵

29 W/m

Physical

length 1410 mm

width 40 mm

height 100 mm

¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)


⁵ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; 2x JUST 26 spotlight module 2,6 W / 159 lm / 3000 K (1x left, 1x right), incl. switch; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

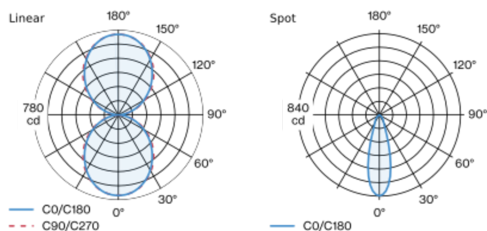


flood 30°

Spot

h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



LINEA opal / 2 spots

wall

058-6174627DH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.99	0.99	0.99	0.99	0.99
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	31
B13	40
B16	50
B20	62
B25	78
C10	52
C13	67
C16	85
C20	104
C25	130

