

LINEA opal / 1 spot

wall

058-6172538CH



Project / Type

Notes

Count / Date



General

Wall , Surface

tilt max 89°

black , RAL9005 ¹

IP20

172 lm

LED

3000 K

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R_g: 92²-99³, R_f: 86²-91³, R_{f(1-5)}: 94²-89³

MR 0.53²-0.61³

MDER 0.48²-0.55³

Optical

flood²-opal (lambertsch)³

beam angle 30°

PstLM ≤ 1.0 ⁴

SVM ≤ 0.4 ⁴

High Performance Opal

Electrical

DALI-2

system 2.7²-17.6³ W

PC1 220-240V

system 64²-99³ lm/W⁵

1 DALI Addr.

Physical

length 710 mm

width 40 mm

height 100 mm

2 kg

right

¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)


⁵ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions




Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface black powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct and indirect light component: HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 97; min. 95% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; JUST 26 spotlight module 2,6 W / 159 lm / 3000 K right; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution

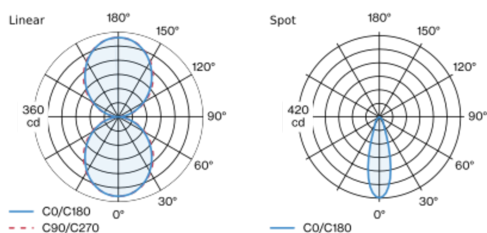

Product drawing



flood 30° Spot

| h (m) | E0° (lx) | ø (m) |
|-------|----------|-------|
| 1 | 419 | 0.54 |
| 2 | 105 | 1.09 |
| 3 | 47 | 1.63 |
| 4 | 26 | 2.17 |
| 5 | 17 | 2.72 |



[058-6172538CH] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com

03.12.2024

LINEA opal / 1 spot

wall

058-6172538CH



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.91 | 0.89 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Faktor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 18 |
| B13 | 23 |
| B16 | 28 |
| B20 | 35 |
| C10 | 30 |
| C13 | 38 |
| C16 | 46 |
| C20 | 58 |

