

LINEA opal / asymmetric

wall


058-6174537AA



Project / Type

Notes

Count / Date

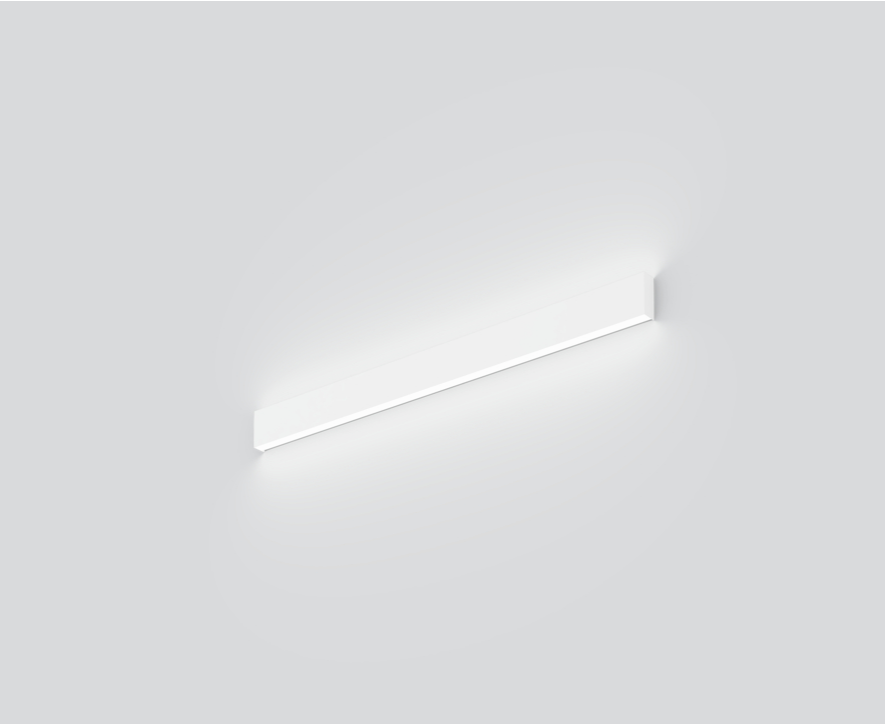

General

Wall , Surface
white , RAL9010 ¹
3200 lm/m
IP20
indirect 2090 lm
direct 1760 lm
total 3850 lm

LED

3000 K
CRI ≥ 90
L85 / 50000 h
photobio. safety RG 0 - no Risk
initial MacAdam ≤ 3 SDCM
R_g: 99 , R_f: 91 , R_{f(1-15)}: 89
MR 0.61
MDER 0.55

Optical

High Performance Opal / Asymmetric
asymmetric
PstLM ≤ 1.0 ²
SVM ≤ 0.4 ²

Electrical

DALI-2
35 W
PC1 220-240V
110 lm/W
1 DALI Addr.
29 W/m

Physical

length 1210 mm
width 40 mm
height 100 mm
3.1 kg


¹ RAL code ² Value of containing product at full load (undimmed)

Installation instructions



Light fitting and front cover made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; suitable for wall mounting; homogeneous wall or ceiling illumination through uniform direct/indirect light distribution; direct light component: HPO (High Performance Opal) cover for uniform illumination; indirect light component: with specially computed, asymmetrical lens for homogeneous lighting intensity (installation optionally for floor or ceiling illumination); light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; min. 85% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; incl. DALI-2 converter; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing

