

# MINO 100 high lumen

surface


056-41M4638H



Project / Type

Notes

Count / Date

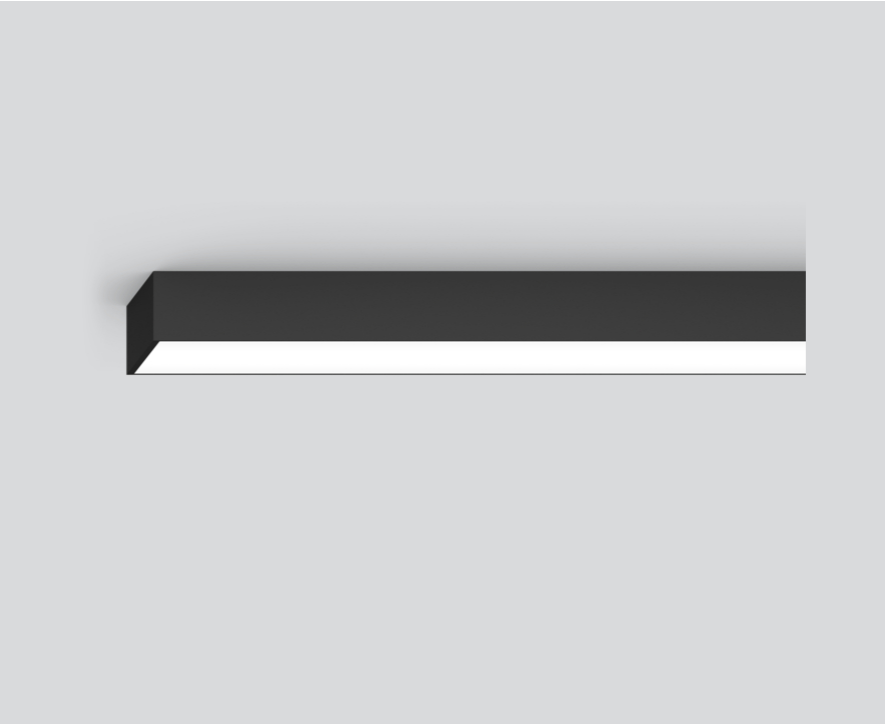

220-240V

X-PERT

CRI

≥ 80

DALI

1ADDR

X-PERT

General

Ceiling , Surface

black , RAL9005 <sup>1</sup>

3020 lm/m

IP20

3540 lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.66

Optical

High Performance Opal

opal (lambertsch)

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

Electrical

DALI-2

27.5 W

PC1 220-240V

129 lm/W

1 DALI Addr.

23 W/m

Physical

length 1188 mm


width 102 mm

height 82 mm


4 kg

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator

