

MINO 100 high lumen

surface


056-41M453GZ



Project / Type

Notes

Count / Date

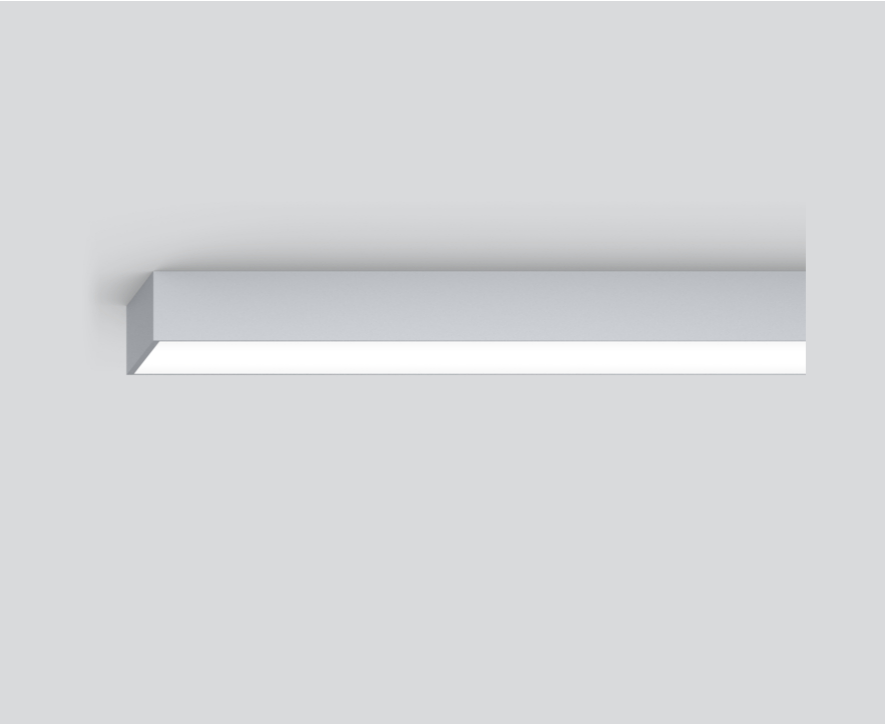

220-240V

X-PERT

UGR
≤22

CRI
≥80

DALI
1ADDR

X-PERT

General

Ceiling , Surface

grey , RAL9006 ¹

2630 lm/m

IP20

3080 lm

LED

3000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.54

MDER 0.49

Optical

Microprismatic

microprismatic

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

DALI-2

27.5 W

PC1 220-240V

112 lm/W

1 DALI Addr.

23 W/m

Physical

length 1188 mm


width 102 mm

height 82 mm


4.3 kg

¹ RAL code ² Value of containing product at full load (undimmed)

Light distribution



Product drawing



Installation instructions



Lighting calculator

