

STRETTA

wall


057-0134517H



Project / Type _____

Notes _____

Count / Date _____

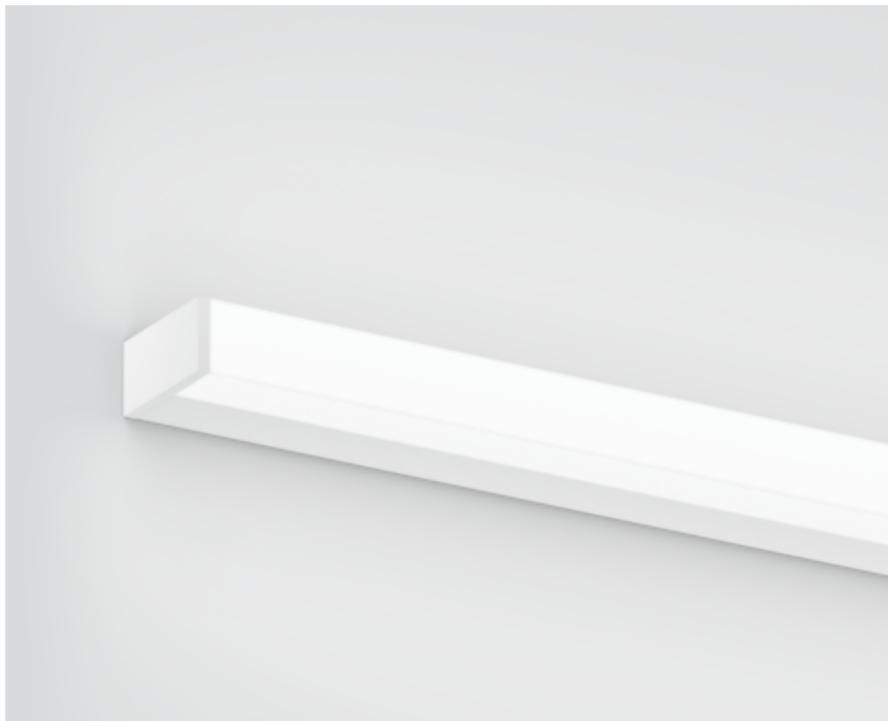

General

Wall , Surface _____

white , RAL 9010 ¹ _____

End cap white _____

IP44 _____

2680 lm _____

LED

3000 K _____

CRI \geq 90 _____

L80 / 50000 h _____

initial MacAdam \leq 3 SDCM _____

R_g: 99 , R_r: 91 , R₍₁₋₁₅₎: 89 _____

MR 0.61 _____

MDER 0.55 _____

Optical

High Performance Opal _____

opal (lambertsch) _____

PstLM \leq 1.0 ² _____

SVM \leq 0.4 ² _____

Electrical

non DIM _____

220-240 V _____

system 26.3 W _____

system 102 lm/W³ _____

PC1 _____

Physical

length 1200 mm _____


width 80 mm _____

height 40 mm _____


1.8 kg _____

Luminaire housing made of extruded aluminium profile; angular design; no visible screws; surface white powder coated; end cap white powder coated; suitable for wall mounting; luminaire profile can be pre-mounted; with three sided light beam; HPO (High Performance Opal) cover for uniform illumination; light colour 3000 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; min. 80% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; degree of protection IP44; PC1; 220-240 V; incl. converter, non dimmable; light source not replaceable; control gear replaceable by an authorized professional;

Light distribution



Product drawing



¹ RAL code ² Value of containing product at full load (undimmed)

³ FIXTURE: incl. consideration of optical losses & internal control unit losses SYSTEM: incl. consideration of optical losses, internal control unit losses & operating device efficiency.

Installation instructions

