

LINEA opal / 1 spot

wall system

058-6142517BH



Project / Type _____

Notes _____

Count / Date _____



RG0 IEC 62471

220-240V

X-PERT

X-PERT

General

Wall , Surface

tilt max 89°

white , RAL9010 ¹

IP20

172 lm

LED

3000 K

CRI ≥ 97²-90³

L95 / 50000 h²-L85 / 50000 h³

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

R_g: 92²-99³, R_f: 86²-91³, R_{f(1-15)}: 94²-89³

MR 0.53²-0.61³

MDER 0.48²-0.55³

Optical

flood²-opal (lambertsch)³

beam angle 30°

PstLM ≤ 1.0 ⁴

SVM ≤ 0.4 ⁴

High Performance Opal

Electrical

non DIM

system 2.7²-17.6³ W

PC1 220-240V

system 64²-100³ lm/W⁵

Physical


length 706 mm

width 40 mm

height 100 mm


left

Light distribution

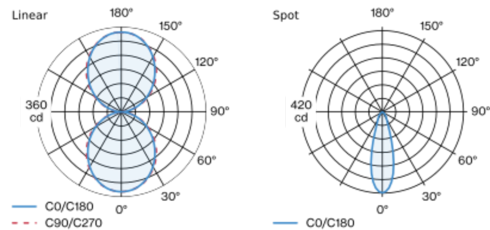

	flood 30°	Spot
h (m)	E0° (lx)	ø (m)
1	419	0.54
2	105	1.09
3	47	1.63
4	26	2.17
5	17	2.72

Product drawing



¹ RAL code ² Spot ³ Linear

⁴ Value of containing product at full load (undimmed)

⁵ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions



LINEA opal / 1 spot

wall system

058-6142517BH



Project / Type

Notes

Count / Date

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.96	0.94	0.91	0.89
LSF	1	1	1	1	1
MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor	
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor	
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor	

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

Automatic Circuit Breaker Type	Number of Fixtures
B10	23
B13	30
B16	36
B20	46
C10	35
C13	50
C16	60
C20	76

Mounting accessories

END CAPS

TYPE	COLOUR	L-W-H (MM)	ARTICLE NUMBER(S)
1 pair	pure white	40-100-12	050-2540107
1 pair	jet black	40-100-12	050-2540108



Mounting accessories

LINEAR CONNECTOR

TYPE	ARTICLE NUMBER(S)
1 piece	050-2551100
10 pieces	050-2551100.10



Electrical accessories

THROUGH WIRE

TYPE	ARTICLE NUMBER(S)
3 x 1,5 mm ² 10 pieces	004-90003
5 x 1,5 mm ² 10 pieces	004-90005

