

# FRAME 100 mid lumen

trim


052-43L8617Z



Project / Type

Notes

Count / Date

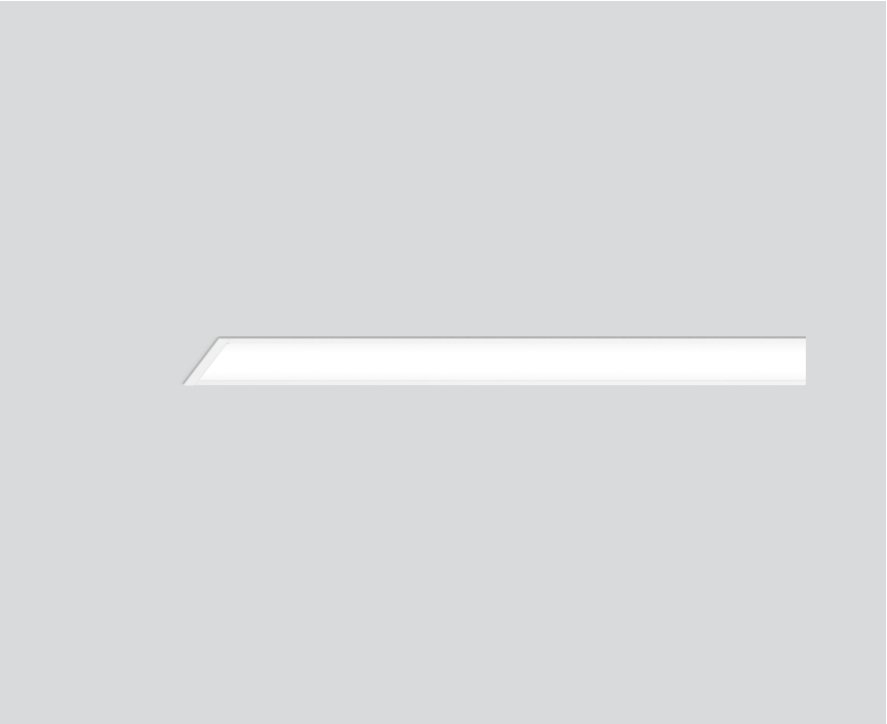

RG0  
IEC 62471

220-240V

X-PERT

X-PERT

### General

Ceiling , Recessed

white , RAL9016 <sup>1</sup>

1680 lm/m

IP20

3950 lm

### LED

4000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.66

### Optical

Microprismatic

microprismatic

PstLM ≤ 1.0 <sup>2</sup>

SVM ≤ 0.4 <sup>2</sup>

### Electrical

non DIM

31 W

PC1 220-240V

127 lm/W

13 W/m

### Physical

trim

length 2368 mm

width 120 mm

height 82 mm

8.1 kg

### Cutout

length 2356 mm

width 108 mm


min. ceiling thickness 8 mm

max. ceiling thickness 25 mm


recessed depth 108 mm

<sup>1</sup> RAL code <sup>2</sup> Value of containing product at full load (undimmed)

### Light distribution



### Product drawing



### Installation instructions



### Lighting calculator



[‘052-43L8617Z’] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of XAL GmbH apply.  
© XAL GmbH · Auer-Welsbach-Gasse 36 · 8055 Graz · Austria · www.xal.com