

FRAME 100 mid lumen

trim


052-43L8617Z



Project / Type

Notes

Count / Date

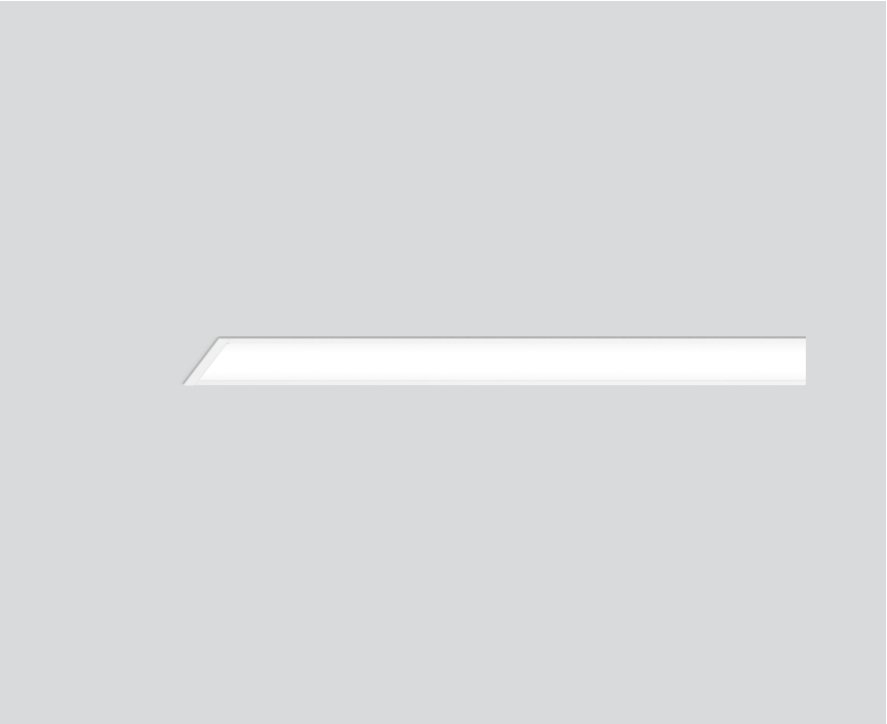

RG0
IEC 62471

220-240V

X-PERT

X-PERT

General

Ceiling , Recessed

white , RAL9016 ¹

1680 lm/m

IP20

3950 lm

LED

4000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.72

MDER 0.66

Optical

Microprismatic

microprismatic

PstLM ≤ 1.0 ²

SVM ≤ 0.4 ²

Electrical

non DIM

31 W

PC1 220-240V

127 lm/W

13 W/m

Physical

trim

length 2368 mm

width 120 mm

height 82 mm

8.1 kg

Cutout

length 2356 mm

width 108 mm

min. ceiling thickness 8 mm


max. ceiling thickness 25 mm

recessed depth 108 mm


¹ RAL code ² Value of containing product at full load (undimmed)

Luminaire housing made of extruded aluminium profile; recessed light with wrap around edge; suitable for ceiling thickness of 8-25 mm; surface white powder coated; lighting profile (end cover and mounting bracket pre-assembled) available in advance for installation; remaining lamp components mounted without tools; LED light inset consisting of highly reflective lacquered aluminium for improved thermal management; light colour 4000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; micro prismatic PMMA diffuser incl. diffuser film for homogeneous illumination and reduced luminance; degree of protection IP20; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. converter, non dimmable; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

Light distribution



Product drawing



Installation instructions



Lighting calculator



FRAME 100 mid lumen

trim

052-43L8617Z



Project / Type

Notes

Count / Date

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|------------------------------|--------|-------------------|---------------------------------|--------|
| LLMF | 0.98 | 0.96 | 0.94 | 0.91 | 0.9 |
| LSF | 1 | 1 | 1 | 1 | 1 |
| MF | LMF × RSMF × LLMF × LSF | | RSMF ^a | Room Surface Maintenance Factor | |
| MF | Maintenance Factor | | LLMF | Lamp Lumens Maintenance Factor | |
| LMF ^a | Luminaire Maintenance Factor | | LSF | Lamp Survival Faktor | |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

Circuit Breaker Types

| Automatic Circuit Breaker Type | Number of Fixtures |
|--------------------------------|--------------------|
| B10 | 17 |
| B13 | 22 |
| B16 | 27 |
| B20 | 34 |
| C10 | 28 |
| C13 | 37 |
| C16 | 46 |
| C20 | 57 |

Mounting accessories

CONCRETE INSTALLATION HOUSING

| TYPE | L·W·H (MM) | ARTICLE NUMBER(S) |
|---------|-------------|-------------------|
| 2407 mm | 2407·116·94 | 036-05236 |

