



Project / Type
Notes
Count / Date



RG0 IEC 62471	220-240V	↑ IP20 ↓ IP40		
------------------	----------	------------------	--	--

General
Ceiling / Wall , Surface ¹ -Semi-Recessed ²
black , RAL9005 ³
jet black
2010 lm/m
front IP20 ¹ -IP40 ² , back IP20
3670 lm

LED
3000 K
CRI ≥ 80
L90 / 50000 h
photobio. safety RG 0 - no Risk
initial MacAdam ≤ 3 SDCM
MR 0.54
MDER 0.49


Optical
High Performance Opal
opal (lambertsch)
PstLM ≤ 1.0 ⁴
SVM ≤ 0.4 ⁴

Low profile recessed mounted luminaire, 15 mm visible height or low profile surface mounted luminaire, 28 mm total height; converter integrated into luminaire housing; suitable for wall or ceiling mounting; suitable for installation in primed or exposed concrete, in plasterboard constructions and in plastered walls or ceilings; for continuous lighting systems; surface black powder coated; fall-safe light inset made of extruded aluminium profile, can be inserted in the canal without tools by magnetic holders; side coupled light directed downward through LGP (LIGHT GUIDING PRISM) body and high efficiency reflector; HPO (High Performance Opal) cover for uniform illumination; flush cover; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 80; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; PC1 220-240V; photobiological safety according to IEC 62471 risk group RG 0 - no Risk; internal wiring in light halogen free; incl. DALI-2 converter; accessories are listed separately; light source not replaceable; control gear replaceable by an authorized professional;


Electrical
DALI-2
system 28.6 W
PC1 220-240V
system 128 lm/W ⁵
1 DALI Addr.
16 W/m

Physical
length 1830 mm
width 89 mm
height 28 mm
4.3 kg

Light distribution

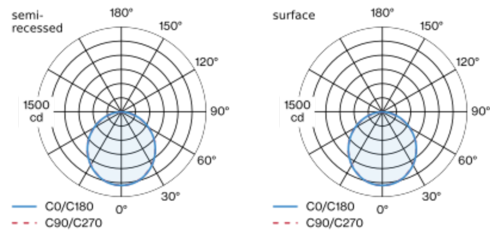

Product drawing



Cutout
length 1843 mm
width 70 mm
min. ceiling thickness 12.5 mm
recessed depth 13 mm

¹ surface ² semi-recessed ³ RAL code
⁴ Value of containing product at full load (undimmed)
⁵ incl. optical losses and the efficiency of the operating device (converter)

Installation instructions

