

LENO microprismatic

semi-recessed / surface system


051-8216537G 051-8920187



Project / Type

Notes

Count / Date

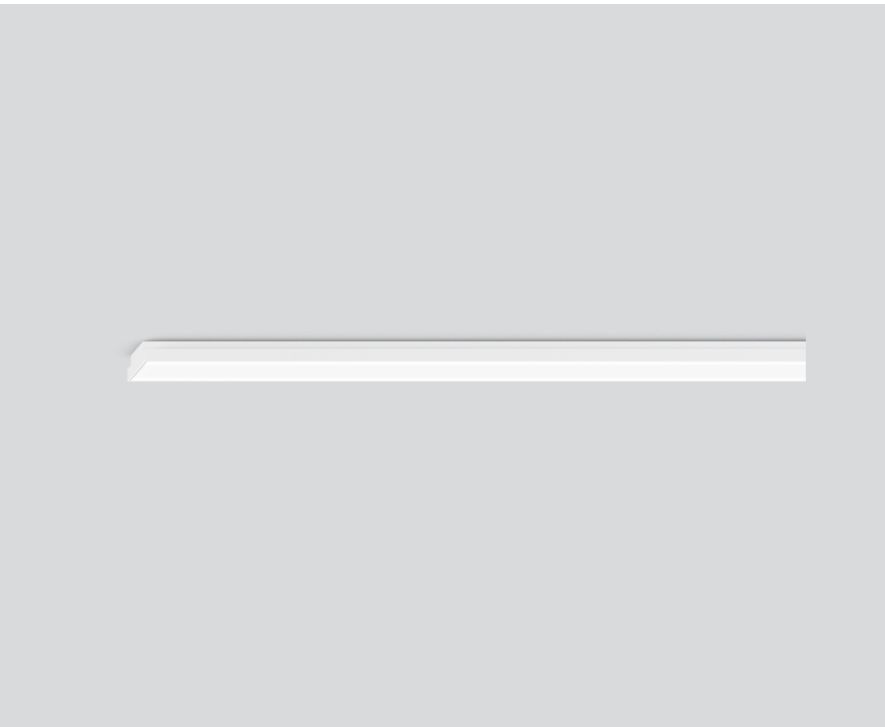

RG0
IEC 62471

220-240V

General

Ceiling / Wall , Semi-Recessed¹-Surface²

white , RAL9010 ³

1900 lm/m

front IP40¹-IP20² , back IP20

3480 lm

traffic white

LED

3000 K

CRI ≥ 80

L90 / 50000 h

photobio. safety RG 0 - no Risk

initial MacAdam ≤ 3 SDCM

MR 0.54

MDER 0.49

Optical

Microprismatic

microprismatic

UGR < 19

PstLM ≤ 1.0 ⁴

SVM ≤ 0.4 ⁴

Electrical

DALI-2

system 28.6 W

PC1 220-240V

system 122 lm/W⁵

1 DALI Addr.

16 W/m

Physical

length 1830 mm

width 89 mm

height 28 mm

5.1 kg

Cutout

length 1843 mm

width 70 mm

min. ceiling thickness 12.5 mm


recessed depth 13 mm

¹ semi-recessed ² surface ³ RAL code


⁴ Value of containing product at full load (undimmed)

⁵ incl. optical losses and the efficiency of the operating device (converter)

Light distribution

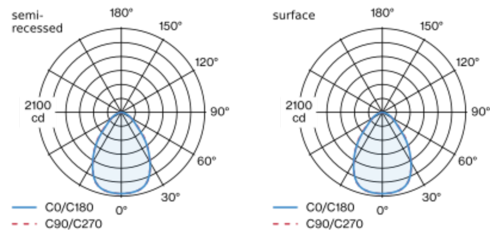

Product drawing



Installation instructions

